



Bobcat LED Lighting 0338101

Product Information

| | |
|--------------------------------------|---|
| Description | Model 220 - 12/24V LED Rear Combination Light |
| Height | 160.78 mm / 6.33 in |
| Width | 66.04 mm / 2.6 in |
| Depth | 27.94 mm / 1.1 in |
| Outer Lens Material | Polycarbonate |
| Outer Lens Color | Clear |
| Housing Material | Polycarbonate |
| Housing Color | Black |
| Retrofits | Bobcat 7104670, 7104671 & 7101384 |
| Minimum Operating Temperature | -40 °C |
| Maximum Operating Temperature | 65 °C |
| Connector or Wiring | Integral DT04-6P |
| Mating Connector | DT06-6S |
| Product Weight | 0.40 lbs / 0.18 kgs |
| Shipping Weight | 2.40 lbs / 1.09 kgs |
| Additional Information | Includes an ECE Reg 3 Class 1 Reflex. |

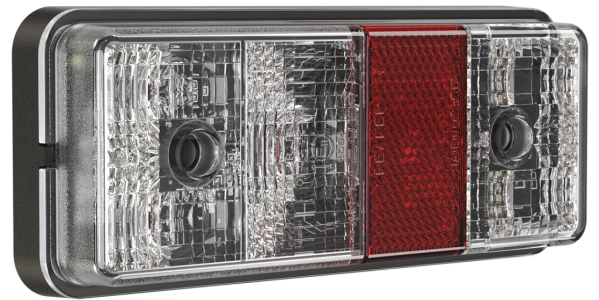

Product Dimensions

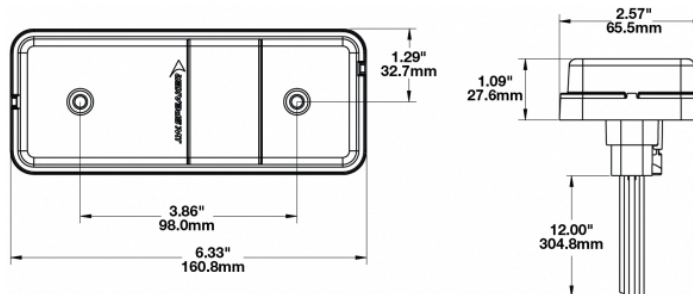

Electrical Specifications



| | |
|--------------------------|--|
| Input Voltage | 12-24V DC |
| Operating Voltage | 6-32V DC |
| Black Wire | Ground |
| White Wire | Reverse |
| Red Wire | Stop |
| Brown Wire | Tail |
| Yellow Wire | Turn |
| Current Draw | 0.16A @ 12V DC (Stop) 0.10A @ 24V DC (Stop) 0.02A @ 12V DC (Tail) 0.01A @ 24V DC (Tail) 1.42A @ 12V DC (Turn) 0.71A @ 24V DC (Turn) 0.14A @ 12V DC (Backup) 0.07A @ 24V DC (Backup) |

Photometric Specifications



| | |
|------------------------|---|
| Beam Pattern(s) | Signalization - Stop Signalization - Tail Signalization - Turn (Rear) |
|------------------------|---|

Additional Specifications



| | |
|----------------------|---|
| IP Rating | IP67 |
| Warranty | Please refer to the Warranty Statement which is available for download on the website |
| Certification | ECE Reg 23, 3, 6 & 7 |
| Pack Quantity | 1 |