



Bobcat LED Lighting

0338101

Height

Width

Depth



Description Model 220 - 12/24V LED Rear

Combination Light 160.78 mm / 6.33 in 66.04 mm / 2.6 in 27.94 mm / 1.1 in

Outer Lens Material Polycarbonate

Outer Lens Color Clear

Housing Material Polycarbonate

Housing Color Black

Retrofits Bobcat 7104670, 7104671 &

7101384

 $\begin{tabular}{ll} \begin{tabular}{ll} \be$

Connector or Wiring Integral DT04-6P

Mating Connector DT06-6S


 $\begin{array}{ll} \textbf{Product Weight} & 0.40 \; \text{lbs / 0.18 kgs} \\ \textbf{Shipping Weight} & 2.40 \; \text{lbs / 1.09 kgs} \end{array}$

Additional Information Includes an ECE Reg 3 Class 1

Reflex.



Product Dimensions

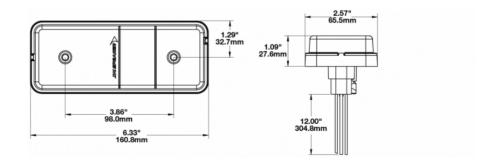







Electrical Specifications

Input Voltage 12-24V DC **Operating Voltage** 6-32V DC **Black Wire** Ground White Wire Reverse **Red Wire** Stop **Brown Wire** Tail **Yellow Wire** Turn

Current Draw 0.16A @ 12V DC (Stop)

0.10A @ 24V DC (Stop) 0.02A @ 12V DC (Tail) 0.01A @ 24V DC (Tail) 1.42A @ 12V DC (Turn) 0.71A @ 24V DC (Turn) 0.14A @ 12V DC (Backup) 0.07A @ 24V DC (Backup)

Photometric Specifications

Beam Pattern(s) Signalization - Stop

Signalization - Tail Signalization - Turn (Rear)

Additional Specifications

IP67 **IP Rating**

Warranty Please refer to the Warranty

Statement which is available for

download on the website

Certification ECE Reg 23, 3, 6 & 7

Pack Quantity





