LED Signal Lights – Model 260

0348751

Product Information

Description	12-24V ECE Stop, Tail, Direction Indicator, Rear Fog, Reverse Light w/ Panel Flush Mount & Clear Lens
Height	78 mm / 3.07 in
Width	300 mm / 11.81 in
Depth	22 mm / 0.87 in
Shape	Stylized
Outer Lens Material	Acrylic
Outer Lens Color	Clear
Housing Material	Polycarbonate
Housing Color	Black
Mounting Hardware Description	0.25" push nut (2), #10 screw (2)
Mounting Type	Flush Mount
Minimum Operating Temperature	-40 °C
Maximum Operating Temperature	65 °C
Connector or Wiring	DTS connector
Product Weight	0.51433846 lbs / 0.23 kgs

Copyright © 2026 Invision Sales Pty. Ltd.

Product Dimensions

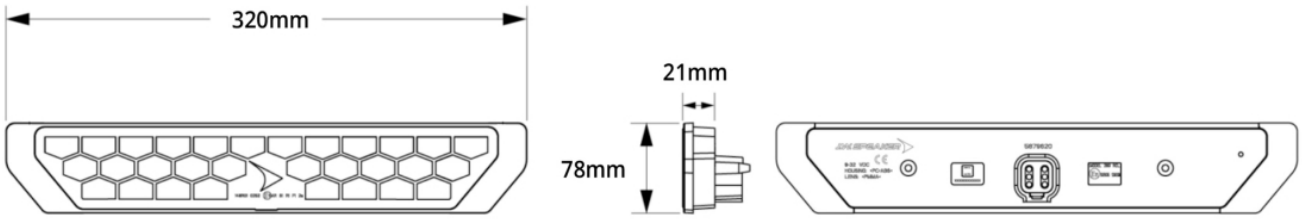

Connector Pin-Out	Light Function
PIN 1	Turn
PIN 2	Ground
PIN 3	Stop/Fog
PIN 4	Fog/Stop
PIN 5	Tail
PIN 6	Back

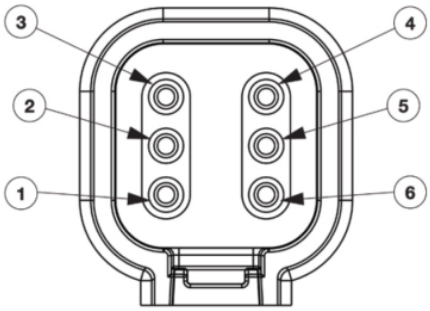

Electrical Specifications

Input Voltage	12-24V DC
Operating Voltage	9-30V DC
Current Draw	0.34A @ 12V DC (Stop) 0.18A @ 12V DC (Turn) 0.33A @ 12V DC (Fog) 0.04A @ 12V DC (Tail) 0.74A @ 12V DC (Backup) 0.17A @ 24V DC (Stop) 0.09A @ 24V DC (Turn) 0.165A @ 24V DC (Fog) 0.02A @ 24V DC (Tail) 0.187A @ 24V DC (Backup)

Copyright © 2026 Invision Sales Pty. Ltd.

Photometric Specifications

Beam Pattern(s)	Signalization - Rear Fog Signalization - Stop Signalization - Tail Signalization - Turn (Rear)

Additional Specifications

IP Rating	IP67, 69K
Warranty	Please refer to the Warranty Statement which is available for download on the website
Pack Quantity	1

Copyright © 2026 Invision Sales Pty. Ltd.