

LED Warning and Safety Light – Model 529


1300561

Product Information

| | |
|----------------------------|--|
| Description | Model 529 - 12/24V LED Safety Light - Red Stripe |
| Height | 59.50 mm / 2.34 in |
| Width | 473.50 mm / 18.64 in |
| Depth | 54.50 mm / 2.15 in |
| Shape | Rectangular |
| Outer Lens Material | Polycarbonate |
| Outer Lens Color | Clear |
| Housing Color | Black |
| Bezel Color | Black |
| Connector or Wiring | 3-pin Deutsche |



Product Dimensions

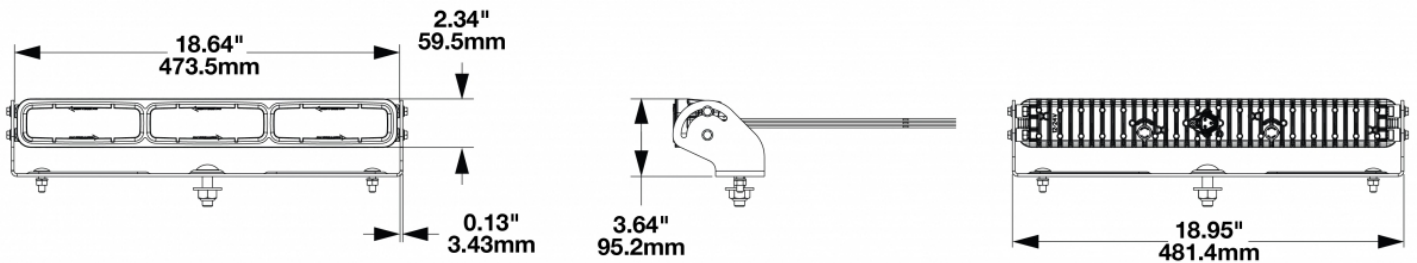


Electrical Specifications

| | |
|-----------------------------------|--|
| Input Voltage | 12-24V DC |
| Operating Voltage | 9-33V DC |
| Transient Spike Protection | 330V Peak @ 1 HZ-100 Pulses |
| Yellow Wire | Steady State On |
| White Wire | Keep Out Zone |
| Black Wire | Ground |
| Current Draw | 3.70A @ 12V DC (Keep Out Zone) 3.70A @ 12V DC (Flashing) 2.30A @ 24V DC (Keep Out Zone) 2.30A @ 24V DC (Flashing) |

Photometric Specifications

| | |
|-------------------------------|----------------|
| Raw Lumen Output | 3,350 |
| Effective Lumen Output | 886 |
| Candela Output | 8,530 |
| Flash Rate 1 | 1 Flash/Second |

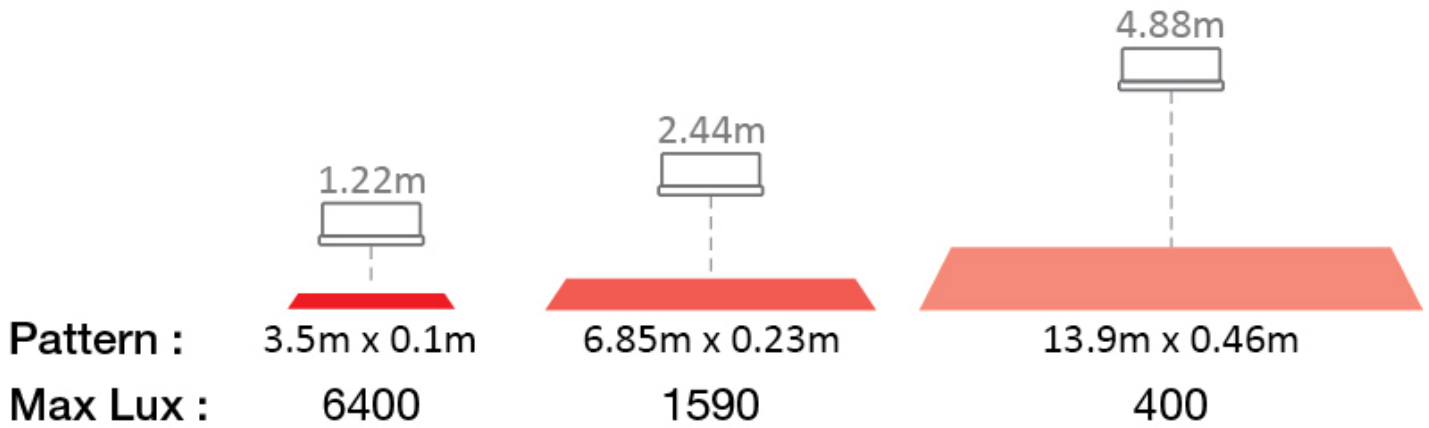

Additional Specifications

| | |
|----------------------|---|
| IP Rating | IP69K |
| Warranty | Please refer to the Warranty Statement which is available for download on the website |
| Certification | Tested to ECE Reg. 10 (Radiated Emissions only) |
| Pack Quantity | 1 |