

# LED Work Light – Model 526

## 1300641

### Product Information

<b>Description</b>	Model 526 EVO - 24V LED Worklight - Anti Glare Beam (Low Beam) *DUAL COLOUR*
<b>Height</b>	160.47 mm / 6.32 in
<b>Width</b>	158.00 mm / 6.22 in
<b>Depth</b>	98.00 mm / 3.86 in
<b>Shape</b>	Square
<b>Outer Lens Material</b>	Polycarbonate
<b>Outer Lens Color</b>	Clear
<b>Housing Material</b>	Die-Cast Aluminum
<b>Housing Color</b>	Black
<b>Mounting Hardware Description</b>	(x1) M10-1.5 x 40mm Mounting Bolt
<b>Mounting Type</b>	Universal Pedestal Mount
<b>Minimum Operating Temperature</b>	-40 °C
<b>Maximum Operating Temperature</b>	65 °C
<b>Connector or Wiring</b>	iCONN connector - IMate23 3 wire
<b>Product Weight</b>	4.60 lbs / 2.09 kgs
<b>Shipping Weight</b>	4.88 lbs / 2.21 kgs
<b>Additional Information</b>	Warm/Cool White Color Temperatures: Warm White: 2800K Cool White: 5000K




### Electrical Specifications

<b>Input Voltage</b>	24V DC
<b>Operating Voltage</b>	16-32V DC
<b>Transient Spike Protection</b>	330V Peak @ 1 HZ-100 Pulses
<b>White Wire</b>	Cool White
<b>Black Wire</b>	Ground
<b>Green Wire</b>	Warm White
<b>Current Draw</b>	3.25A @ 24V DC (Cool White) 3.25A @ 24V DC (Warm White)

## Photometric Specifications

<b>Raw Lumen Output</b>	9900 (cool white), 7500 (warm white)
<b>Effective Lumen Output</b>	3464 (cool white), 3390 (warm white)
<b>Candela Output</b>	4488 (cool white), 4508 (warm white)

### Model 526 - Anti Glare Low Beam

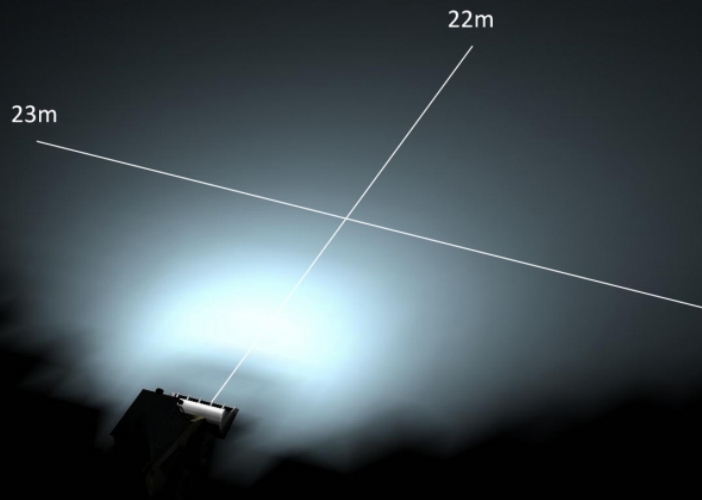

Beam Measurements - 1 Lux

Lamp Mounting: 2.15m High -10° Down

## Additional Specifications

<b>IP Rating</b>	IP69K
<b>Warranty</b>	Please refer to the Warranty Statement which is available for download on the website
<b>Pack Quantity</b>	1