

# LED Work Light – Model 526

## 1300641

### Product Information

<b>Description</b>	Model 526 EVO - 24V LED Worklight - Anti Glare Beam (Low Beam) *DUAL COLOUR*
<b>Height</b>	160.47 mm / 6.32 in
<b>Width</b>	158.00 mm / 6.22 in
<b>Depth</b>	98.00 mm / 3.86 in
<b>Shape</b>	Square
<b>Outer Lens Material</b>	Polycarbonate
<b>Outer Lens Color</b>	Clear
<b>Housing Material</b>	Die-Cast Aluminum
<b>Housing Color</b>	Black
<b>Mounting Hardware Description</b>	(x1) M10-1.5 x 40mm Mounting Bolt
<b>Mounting Type</b>	Universal Pedestal Mount
<b>Minimum Operating Temperature</b>	-40 °C
<b>Maximum Operating Temperature</b>	65 °C
<b>Connector or Wiring</b>	iCONN connector - IMate23 3 wire
<b>Product Weight</b>	4.60 lbs / 2.09 kgs
<b>Shipping Weight</b>	4.88 lbs / 2.21 kgs
<b>Additional Information</b>	Warm/Cool White Color Temperatures: Warm White: 2800K Cool White: 5000K




### Electrical Specifications

<b>Input Voltage</b>	24V DC
<b>Operating Voltage</b>	16-32V DC
<b>Transient Spike Protection</b>	330V Peak @ 1 HZ-100 Pulses
<b>White Wire</b>	Cool White
<b>Black Wire</b>	Ground
<b>Green Wire</b>	Warm White
<b>Current Draw</b>	3.25A @ 24V DC (Cool White) 3.25A @ 24V DC (Warm White)

Photometric Specifications

Raw Lumen Output	9900 (cool white), 7500 (warm white)
Effective Lumen Output	3464 (cool white), 3390 (warm white)
Candela Output	4488 (cool white), 4508 (warm white)

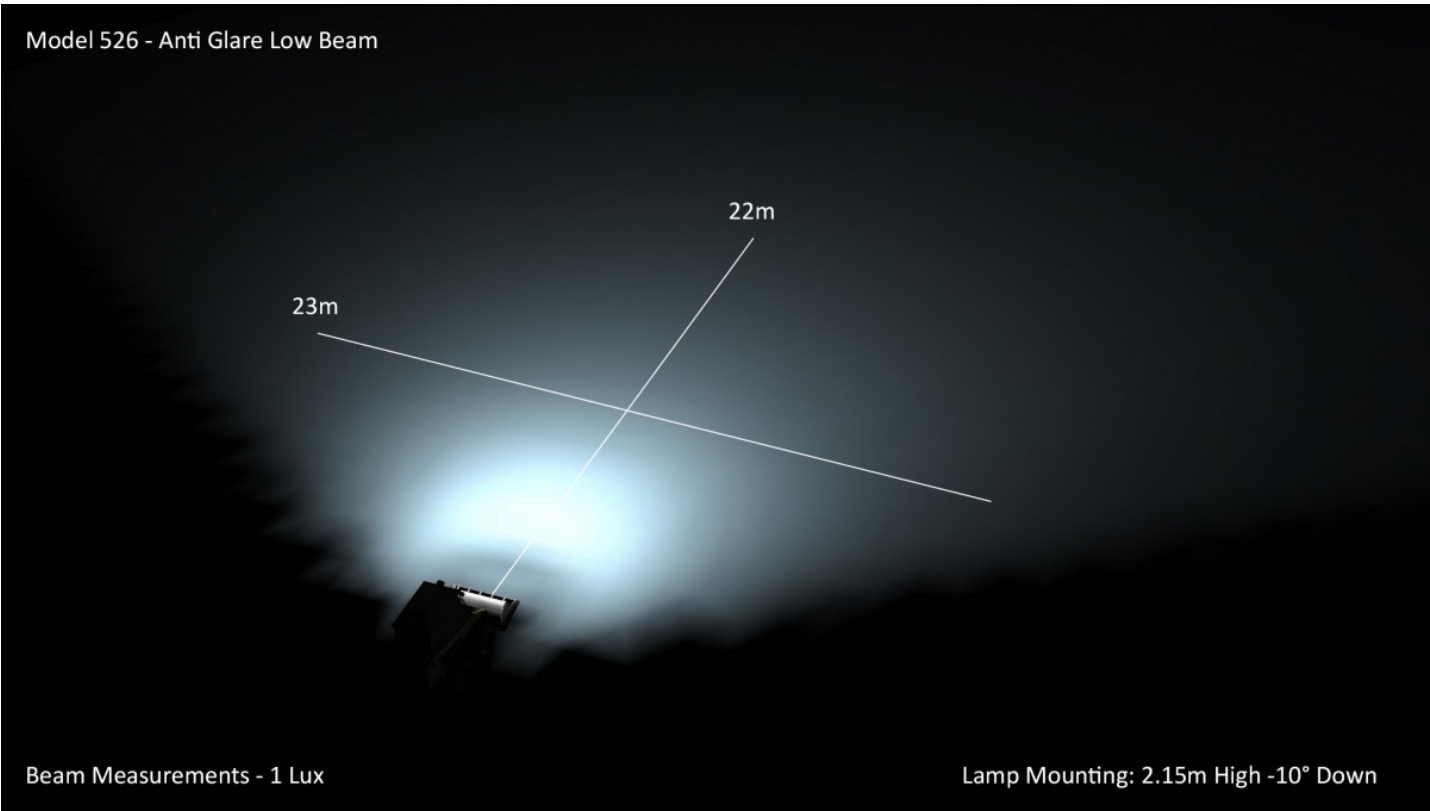

Additional Specifications

IP Rating	IP69K
Warranty	Please refer to the Warranty Statement which is available for download on the website
Pack Quantity	1