

LED Work Light – Model 526

1300641

Product Information

Description	Model 526 EVO - 24V LED Worklight - Anti Glare Beam (Low Beam) *DUAL COLOUR*
Height	160.47 mm / 6.32 in
Width	158.00 mm / 6.22 in
Depth	98.00 mm / 3.86 in
Shape	Square
Outer Lens Material	Polycarbonate
Outer Lens Color	Clear
Housing Material	Die-Cast Aluminum
Housing Color	Black
Mounting Hardware Description	(x1) M10-1.5 x 40mm Mounting Bolt
Mounting Type	Universal Pedestal Mount
Minimum Operating Temperature	-40 °C
Maximum Operating Temperature	65 °C
Connector or Wiring	iCONN connector - IMate23 3 wire
Product Weight	4.60 lbs / 2.09 kgs
Shipping Weight	4.88 lbs / 2.21 kgs
Additional Information	Warm/Cool White Color Temperatures: Warm White: 2800K Cool White: 5000K



Electrical Specifications


Input Voltage	24V DC
Operating Voltage	16-32V DC
Transient Spike Protection	330V Peak @ 1 HZ-100 Pulses
White Wire	Cool White
Black Wire	Ground
Green Wire	Warm White
Current Draw	3.25A @ 24V DC (Cool White) 3.25A @ 24V DC (Warm White)

Photometric Specifications



Raw Lumen Output	9900 (cool white), 7500 (warm white)
Effective Lumen Output	3464 (cool white), 3390 (warm white)
Candela Output	4488 (cool white), 4508 (warm white)

Model 526 - Anti Glare Low Beam

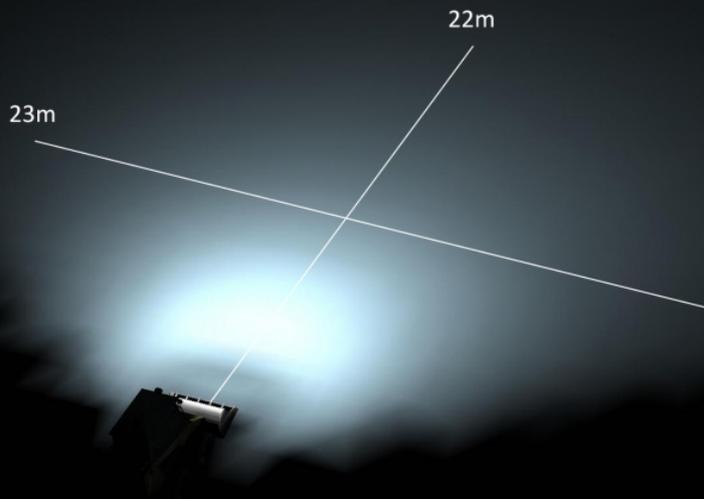

Beam Measurements - 1 Lux

Lamp Mounting: 2.15m High -10° Down

Additional Specifications



IP Rating	IP69K
Warranty	Please refer to the Warranty Statement which is available for download on the website
Pack Quantity	1