

## LED Compact Work Light – Model 792


1603951

## Product Information

<b>Description</b>	Model 792 - 12/24V LED Work Light - Panel Mount
<b>Height</b>	82.06 mm / 3.23 in
<b>Width</b>	98.80 mm / 3.89 in
<b>Depth</b>	43.40 mm / 1.71 in
<b>Shape</b>	Rectangular
<b>Outer Lens Material</b>	Polycarbonate
<b>Outer Lens Color</b>	Clear
<b>Housing Color</b>	Black
<b>Minimum Operating Temperature</b>	-40 °C
<b>Maximum Operating Temperature</b>	65 °C
<b>Mating Connector</b>	JAE Connector MX19A003S51 harness included with flying leads
<b>Product Weight</b>	0.40 lbs / 0.18 kgs
<b>Shipping Weight</b>	7.19 lbs / 3.26 kgs



## Product Dimensions

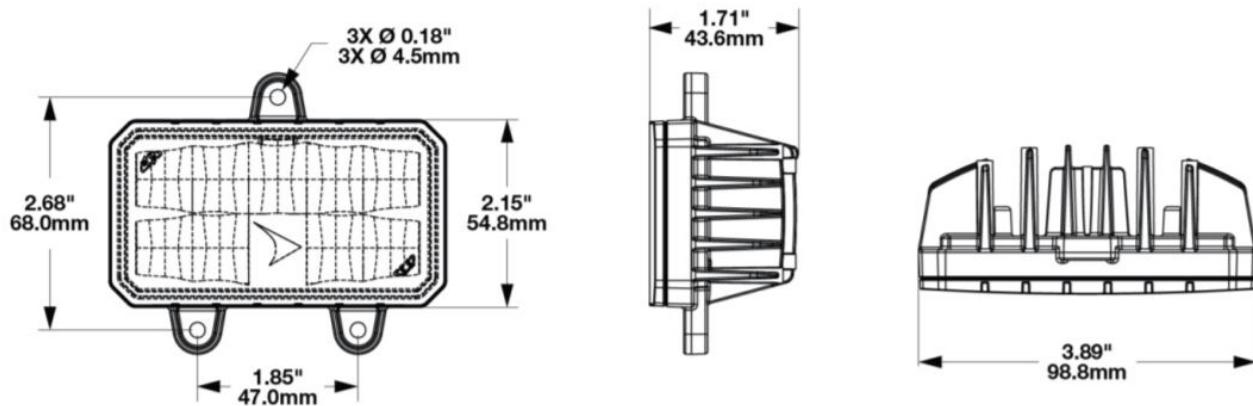

## Electrical Specifications

---

<b>Input Voltage</b>	12-24V DC
<b>Operating Voltage</b>	9-30V DC
<b>Transient Spike Protection</b>	330V Peak @ 1 HZ-100 Pulses
<b>Red Wire</b>	Power
<b>Black Wire</b>	Ground
<b>Current Draw</b>	2.2A @ 12V DC (Power) 1.0A @ 24V DC (Power)

## Photometric Specifications

---

<b>Raw Lumen Output</b>	3630
<b>Effective Lumen Output</b>	2000
<b>Candela Output</b>	2900
<b>Nominal LED Color Temperature</b>	5000 K
<b>Beam Pattern(s)</b>	Forward Lighting - Flood (Standard)

## Additional Specifications

---

<b>IP Rating</b>	IP67 & IP69K
<b>Warranty</b>	Please refer to the Warranty Statement which is available for download on the website
<b>Pack Quantity</b>	1