Wiring Harness Kits & Accessories

NX200

Product Information

Description	12V & 24V Wiring Harness Kit - For 2 x Driving Lights
Height	250 mm / 9.84 in
Width	115 mm / 4.53 in
Depth	80 mm / 3.15 in
Shape	Rectangular
Connector or Wiring	For installation of 2 x Noxsolis driving lights
Shipping Weight	1.59 lbs / 0.72 kgs




Product Dimensions

Copyright © 2026 Invision Sales Pty. Ltd.

DESCRIPTION

- A Relay (4-Pin 12V DC 40A)
- B Fuse Holder
- C Blade Fuse (30A)
- D Red Eyelet
- E Black Eyelet
- F 3-Pin Rocker Switch
- G 3-Pin Female Connector
- H 3-Pin Male Connector
- I 2-Pin Deutsch DT Connector Socket
- J High Beam Connection
  Option 1: Bare Cable (into high beam circuit)
  Option 2: H4 / HB3 Adaptor Cable

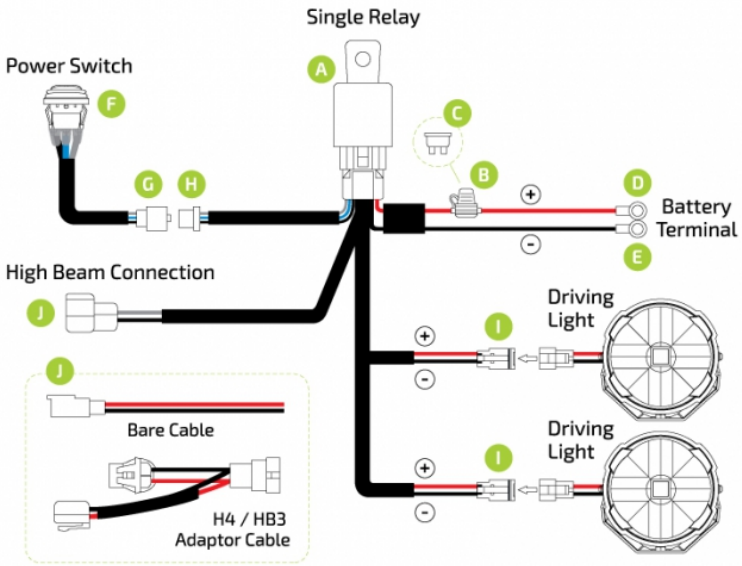


NOTICE FOR SWITCH

- The switch was connected to the wiring harness by default:
  - **White wire (+)** to the prong with one hole on edge.
  - **Black wire (-)** to the prong with two holes.
  - **Blue wire (Trigger)** to the prong with one hole in middle.
- If you want to use with other switches instead, please make sure all three wires are connected correctly.

CAUTION

- The Max Load Current for this wiring harness is 24 Amp (12 Amp per lead), please make sure the max current load for your light is less than this.
- This wiring harness comes with a 30 Amp blade fuse. You can change it to another proper fuse for your needs.

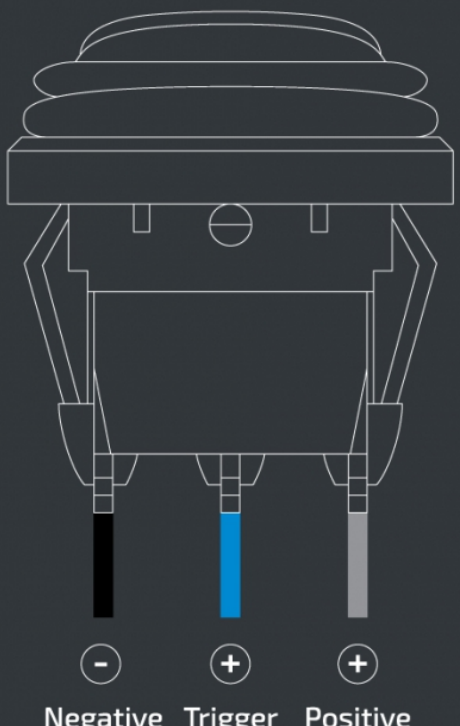

Copyright © 2026 Invision Sales Pty. Ltd.

Electrical Specifications

Operating Voltage	12V DC

Photometric Specifications

Beam Pattern(s)	Forward Lighting - Driving



Additional Specifications

IP Rating	IP69K
Warranty	3 Years
Pack Quantity	1

Copyright © 2026 Invision Sales Pty. Ltd.