

Wiring Harness Kits & Accessories

NX210

Product Information


Description	12V & 24V Wiring Harness Kit - For 1 x Light Bar
Height	250 mm / 9.84 in
Width	115 mm / 4.53 in
Depth	80 mm / 3.15 in
Shape	Rectangular
Connector or Wiring	2 Pin DT Connection
Shipping Weight	1.5 lbs / 0.68 kgs



Product Dimensions

DESCRIPTION

- A** Relay (4-Pin 12V DC 40A)
- B** Fuse Holder
- C** Blade Fuse (30A)
- D** Red Eyelet
- E** Black Eyelet
- F** 3-Pin Rocker Switch
- G** 3-Pin Female Connector
- H** 3-Pin Male Connector
- I** 2-Pin Deutsch DT Connector Socket
- J** High Beam Connection
 - Option 1:** Bare Cable (into high beam circuit)
 - Option 2:** H4 / HB3 Adaptor Cable

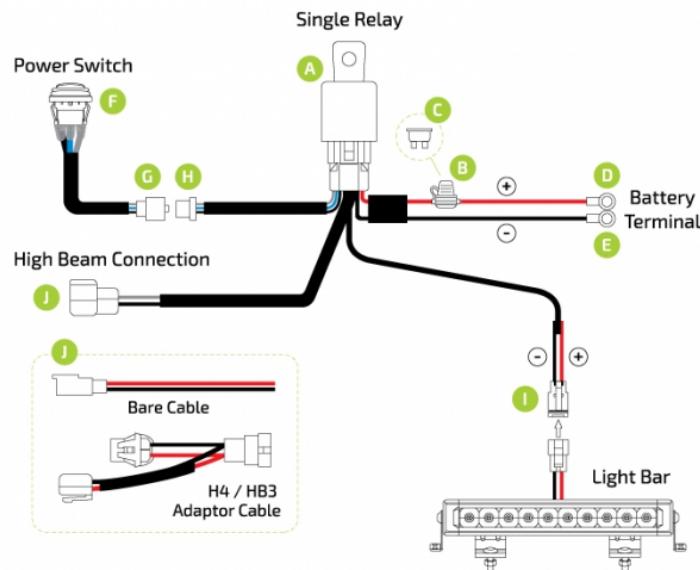


NOTICE FOR SWITCH

- The switch was connected to the wiring harness by default:
 - **White wire (+)** to the prong with one hole on edge.
 - **Black wire (-)** to the prong with two holes.
 - **Blue wire (Trigger)** to the prong with one hole in middle.
- If you want to use with other switches instead, please make sure all three wires are connected correctly.

CAUTION

- The Max Load Current for this wiring harness is 24 Amp (12 Amp per lead), please make sure the max current load for your light is less than this.
- This wiring harness comes with a 30 Amp blade fuse. You can change it to another proper fuse for your needs.

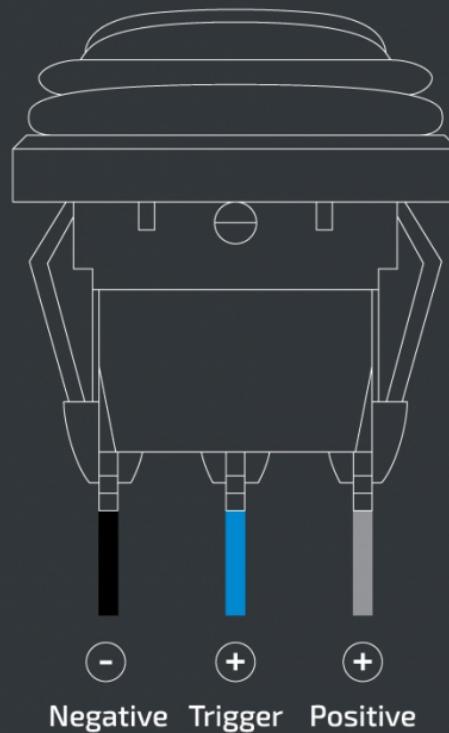

Electrical Specifications

Operating Voltage	12V DC
--------------------------	--------

Photometric Specifications

Beam Pattern(s)	Forward Lighting - Driving
------------------------	----------------------------



Additional Specifications

IP Rating	IP69K
Warranty	3 Years
Pack Quantity	1