

NX3 - LED Beacons

NX350




Product Information

Description	Amber LED Beacon - Low Profile - 3 Point Mount
Height	51 mm / 2.01 in
Width	110 mm / 4.33 in
Depth	110 mm / 4.33 in
Shape	Round
Outer Lens Material	Polycarbonate
Housing Material	Die-Cast Aluminum
Housing Color	Black
Mounting Hardware Description	3 x Mounting Screws Included
Mounting Type	Low Profile Mount
Minimum Operating Temperature	-40 °C
Maximum Operating Temperature	65 °C
Connector or Wiring	500mm hardwire fly lead
Product Weight	0.86840085 lbs / 0.39 kgs



Product Dimensions

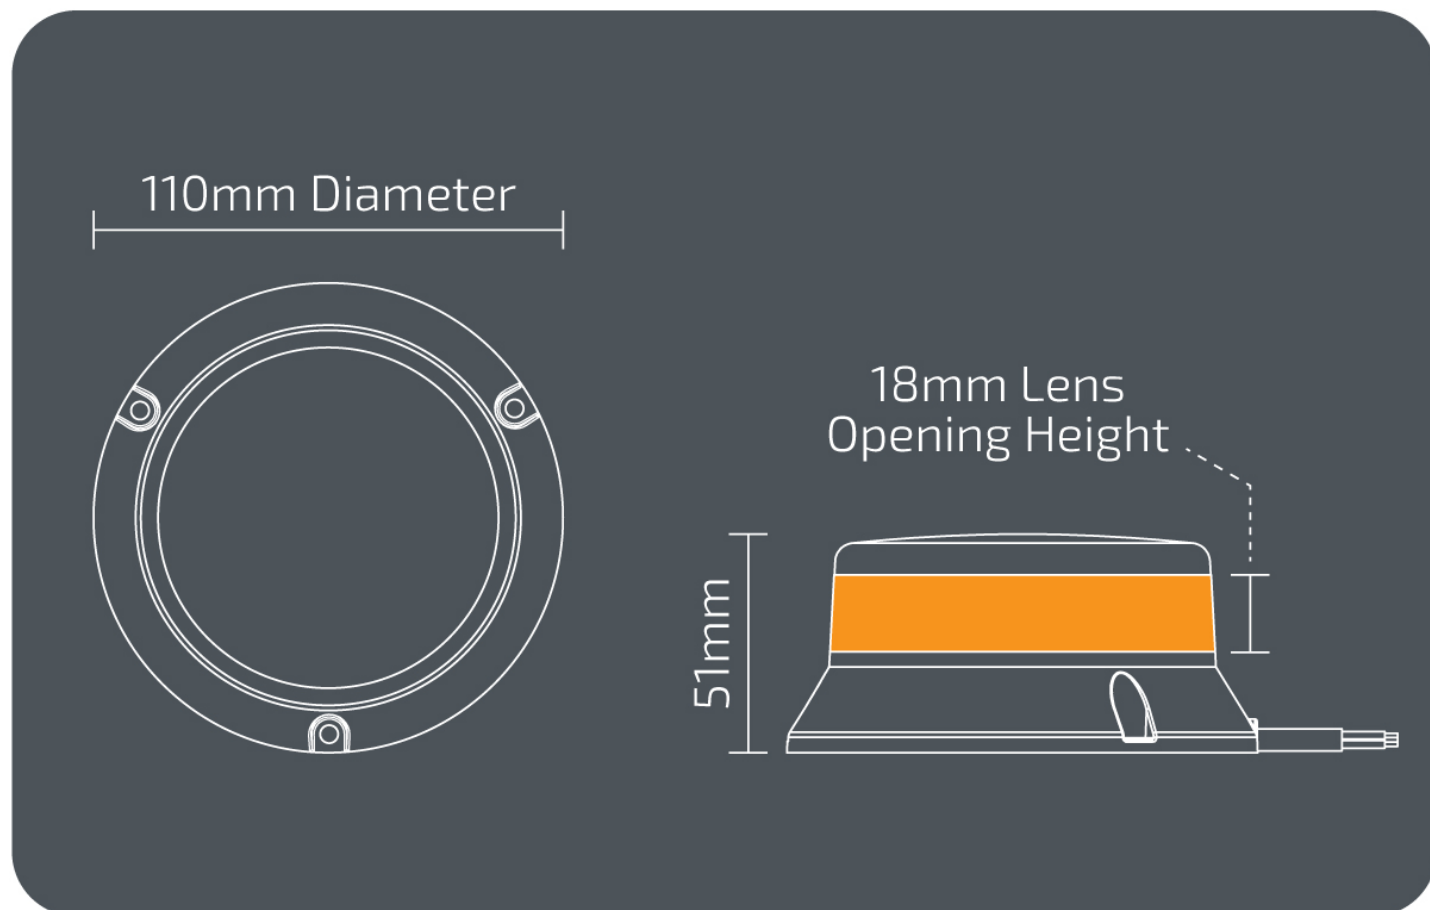

Electrical Specifications



Input Voltage	12-24V DC
Operating Voltage	12-24V DC
Wattage	24 W
Red Wire	Positive
Black Wire	Negative
Yellow Wire	Mode Select
Current Draw	3.1AA @ 13.8V DC 1.7AA @ 24V DC












Additional Specifications

IP Rating	IP67
Warranty	3 Years
Certification	EMI: CISPR 25 Class 3, ECE R10 - Operation: ECE R65 Class 1 & SAEJ845 Class 1
Pack Quantity	1 Beacon

Installation & Application Information

Flash Modes

Note: This product does have mode memory

-  Single Flash – 2.1Hz 126 Flash / Min – ECE R65 Class 1
-  Single Flash – 1.25Hz 75 Flash / Min
-  Double Flash
-  Triple Flash
-  Quadruple Flash
-  Quintuple Flash
-  Rotating
-  Combo – Single / Triple Flash
-  Combo – Single / Quintuple Flash
-  Strobe
-  Cruise / Solid On – 30% Brightness for night use