NX3 - LED Beacons
NX350 (Bulk Buy Price)
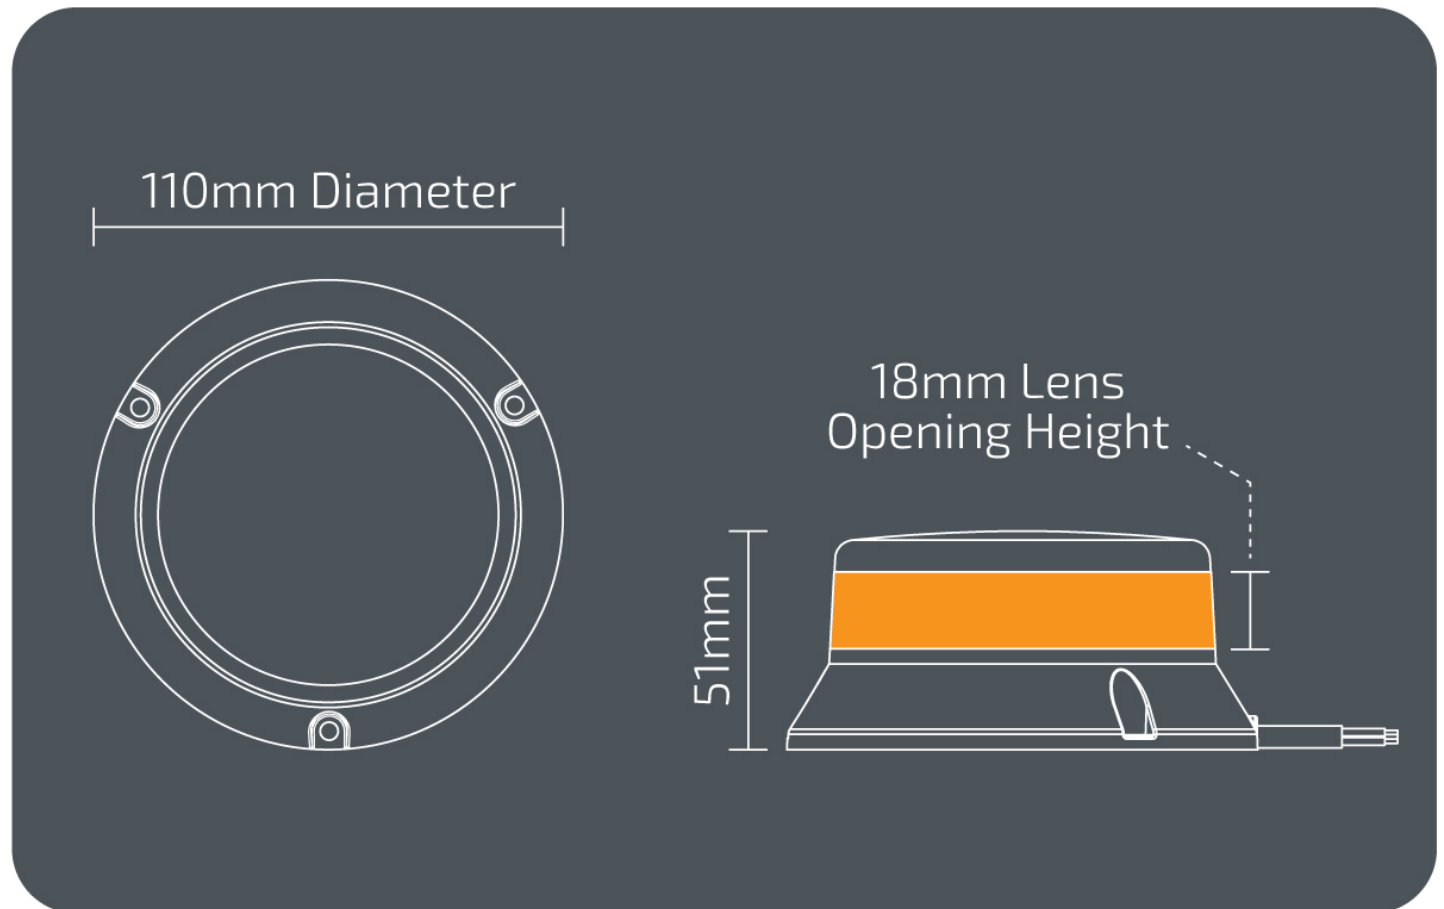
ADR APPROVED

EST. 1896

Product Information ⌄

Description	Amber LED Beacon - Low Profile - 3 Point Mount (Bulk Buy - Min QTY 6)
Height	51 mm / 2.01 in
Width	110 mm / 4.33 in
Depth	110 mm / 4.33 in
Shape	Round
Outer Lens Material	Polycarbonate
Housing Material	Die-Cast Aluminum
Housing Color	Black
Mounting Hardware Description	3 x Mounting Screws Included
Mounting Type	Low Profile Mount
Minimum Operating Temperature	-40 °C
Maximum Operating Temperature	65 °C
Connector or Wiring	500mm hardwire fly lead
Product Weight	0.86840085 lbs / 0.39 kgs

Headlight   INVISION®   J.W. SPEAKER.   noxsolis™   TUNGSRAM Innovation is our heritage EST. 1896

INVISION®

Product Dimensions ⌄

110mm Diameter

18mm Lens
Opening Height

51mm

Electrical Specifications ⌄

Input Voltage	12-24V DC
Operating Voltage	12-24V DC
Wattage	24 W
Red Wire	Positive
Black Wire	Negative
Yellow Wire	Mode Select
Current Draw	3.1AA @ 13.8V DC 1.7AA @ 24V DC

Headlight   INVISION®   J.W. SPEAKER   noxsolis   TUNGSRAM Innovation is our heritage EST. 1896

Additional Specifications ⌄

IP Rating	IP67
Warranty	3 Years
Certification	EMI: CISPR 25 Class 3, ECE R10 - Operation: ECE R65 Class 1 & SAEJ845 Class 1
Pack Quantity	1 Beacon

Installation & Application Information ⌄

Flash Modes

Note: This product does have mode memory

◯ Single Flash – 2.1Hz 126 Flash / Min – ECE R65 Class 1

◯ Single Flash – 1.25Hz 75 Flash / Min

◯ Double Flash

◯ Triple Flash

◯ Quadruple Flash

◯ Quintuple Flash

◯ Rotating

◯ Combo – Single / Triple Flash

◯ Combo – Single / Quintuple Flash

◯ Strobe

◯ Cruise / Solid On – 30% Brightness for night use