



NX3 - LED Beacons

NX351



Description Amber LED Beacon - Low Profile -

Magnetic Mount w/ 12V Vehicle

Plug

 Height
 51 mm / 2.01 in

 Width
 110 mm / 4.33 in

 Depth
 110 mm / 4.33 in

Shape Round

Outer Lens MaterialPolycarbonateHousing MaterialDie-Cast Aluminum

Housing Color Black

Mounting Hardware Description Magnetic Mount

Minimum Operating Temperature $-40 \, ^{\circ}\text{C}$ Maximum Operating Temperature $65 \, ^{\circ}\text{C}$

Connector or Wiring 2.5m cable with 12V vehicle

accessory plug

Product Weight 1.300066 lbs / 0.59 kgs












Product Dimensions

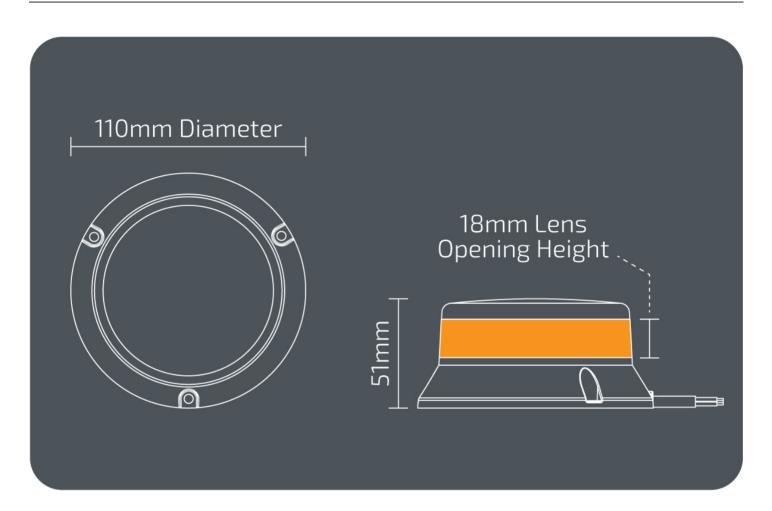

Electrical Specifications

Input Voltage 12-24V DC **Operating Voltage** 12-24V DC Wattage 24 W

Current Draw 3.1AA @ 13.8V DC 1.7AA @ 24V DC









Additional Specifications

IP Rating IP67 Warranty 3 Years

Certification EMI: CISPR 25 Class 3, ECE R10 -

Operation: ECE R65 Class 1 &

SAEJ845 Class 1

Pack Quantity 1 Beacon

Installation & Application Information

Flash Modes

Note: This product does have mode memory

	Cinale Fleeb 0.111-106 Fleeb / Min FOF DCF Class 1
	Single Flash - 2.1Hz 126 Flash / Min - ECE R65 Class 1
	9

. "		
As .	-	Cinala Floob 1 OFLIP 7F Floob / Min
	-	Single Flash - 1.25Hz 75 Flash / Min
-		9

A 11 1 1		
1 2	Double Flash	
	Double Hash	



1	Quadruple Flash
	Quadrupic i lasii











