

# NX3 - LED Beacons


## NX360

### Product Information

<b>Description</b>	Amber LED Beacon - Medium Profile - 3 Point Mount
<b>Height</b>	84 mm / 3.31 in
<b>Width</b>	120 mm / 4.72 in
<b>Depth</b>	120 mm / 4.72 in
<b>Shape</b>	Round
<b>Outer Lens Material</b>	Polycarbonate
<b>Housing Material</b>	Die-Cast Aluminum
<b>Housing Color</b>	Black
<b>Mounting Hardware Description</b>	3 x Mounting Screws Included
<b>Minimum Operating Temperature</b>	-40 °C
<b>Maximum Operating Temperature</b>	65 °C
<b>Connector or Wiring</b>	500mm hardwire fly lead
<b>Product Weight</b>	1.0522664 lbs / 0.48 kgs



## Product Dimensions

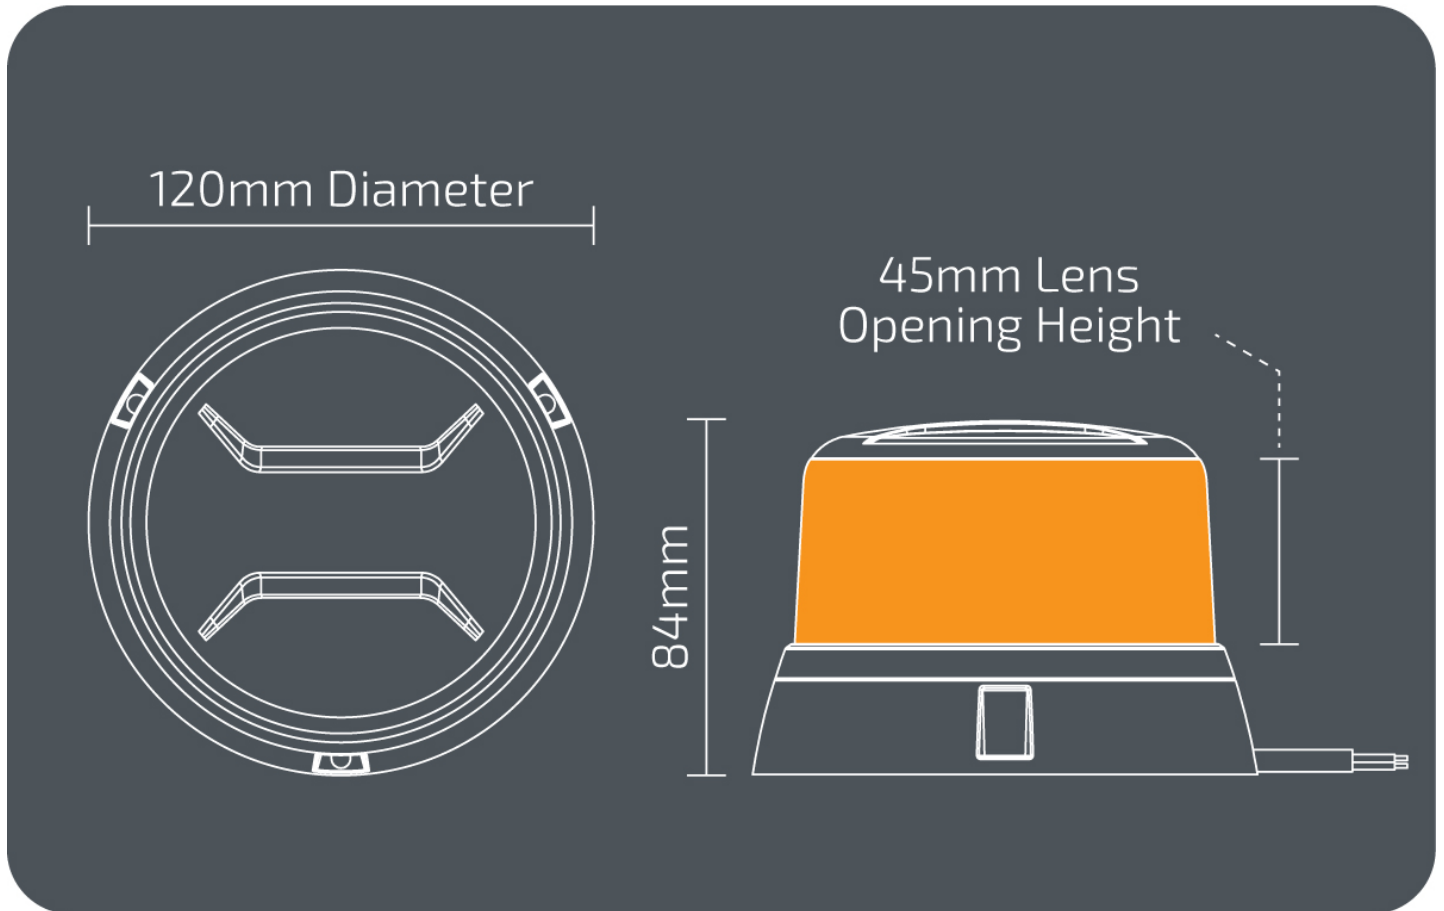

## Electrical Specifications



<b>Input Voltage</b>	12-24V DC
<b>Operating Voltage</b>	12-24V DC
<b>Wattage</b>	16 W
<b>Red Wire</b>	Positive
<b>Black Wire</b>	Negative
<b>Yellow Wire</b>	Mode Select
<b>Current Draw</b>	1.7AA @ 13.8V DC 1.0AA @ 24V DC












## Additional Specifications

<b>IP Rating</b>	IP67
<b>Warranty</b>	3 Years
<b>Certification</b>	EMI: CISPR 25 Class 3, ECE R10 - Operation: ECE R65 Class 1 & SAEJ845 Class 1
<b>Pack Quantity</b>	1 Beacon

## Installation & Application Information

### Flash Modes

*Note: This product does have mode memory*

-  Single Flash – 2.1Hz 126 Flash / Min – ECE R65 Class 1
-  Single Flash – 1.25Hz 75 Flash / Min
-  Double Flash
-  Triple Flash
-  Quadruple Flash
-  Quintuple Flash
-  Rotating
-  Combo – Single / Triple Flash
-  Combo – Single / Quintuple Flash
-  Strobe
-  Cruise / Solid On – 30% Brightness for night use