

NX3 - LED Beacons

Product Information

Description

	- Magnetic Mount Plug
Height	84 mm / 3.31 in
Width	120 mm / 4.72 in
Depth	120 mm / 4.72 in
Shape	Round
Outer Lens Material	Polycarbonate
Housing Material	Die-Cast Aluminur
Housing Color	Black
Mounting Hardware Description	Magnetic Mount
Minimum Operating Temperature	-40 °C
Maximum Operating Temperature	65 °C
Connector or Wiring	2.5m cable with 12 accessory plug
Product Weight	1.5154576 lbs / 0.

Amber LED Beacon - Medium Profile - Magnetic Mount w/ 12V Vehicle Plug 84 mm / 3.31 in 120 mm / 4.72 in 120 mm / 4.72 in Round Polycarbonate Die-Cast Aluminum Black Magnetic Mount -40 °C 65 °C 2.5m cable with 12V vehicle accessory plug 1.5154576 lbs / 0.69 kgs




×

NCXSOLIS







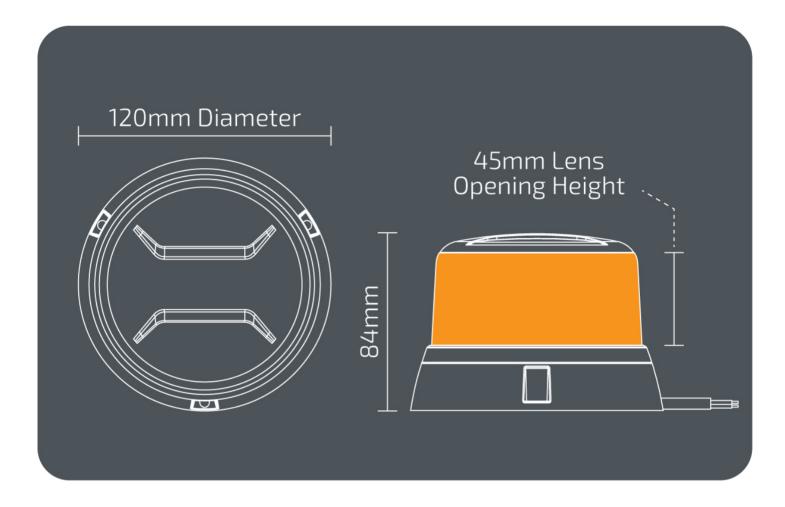

Electrical Specifications

Input Voltage	12-24V DC
Operating Voltage	12-24V DC
Wattage	16 W
Current Draw	1.7AA @ 13.8V DC 1.0AA @ 24V DC





Additional Specifications

IP Rating	IP67
Warranty	3 Years
Certification	EMI: CISPR 25 Class 3, ECE R10 - Operation: ECE R65 Class 1 & SAEJ845 Class 1
Pack Quantity	1 Beacon

Installation & Application Information

Flash Modes

Note: This product does have mode memory

	, , ,
	Single Flash – 2.1Hz 126 Flash / Min – ECE R65 Class 1
	Single Flash – 1.25Hz 75 Flash / Min
***** **** *****	Double Flash
	Triple Flash
	Quadruple Flash
	Quintuple Flash
	Rotating
	Combo – Single / Triple Flash
4 5 7 8 6 6 8 8 9 8 9 8 8 1 5 9	Combo – Single / Quintuple Flash
	Strobe
4 5 5 4 4 6 10 10 10 10 10 10 10 10 10 10 10 10 10 10 10 10 1	Cruise / Solid On – 30% Brightness for night use



