## 

# NX3 - LED Beacons

### Product Information

#### Description

Height	1
Width	1
Depth	1
Shape	R
Outer Lens Material	Ρ
Housing Material	D
Housing Color	В
Minimum Operating Temperature	-2
Maximum Operating Temperature	6
Connector or Wiring	D
Product Weight	1

Amber LED Beacon - Medium Profile - DIN Pole Mount 148 mm / 5.83 in 111 mm / 4.37 in 111 mm / 4.37 in Round Polycarbonate Die-Cast Aluminum Black -40 °C 65 °C DIN Pole Mount 1.1369239 lbs / 0.52 kgs



×

**NCXSOLIS** 




INVISION. J.W. SPEAKER. DCXSOLIS.





#### Product Dimensions

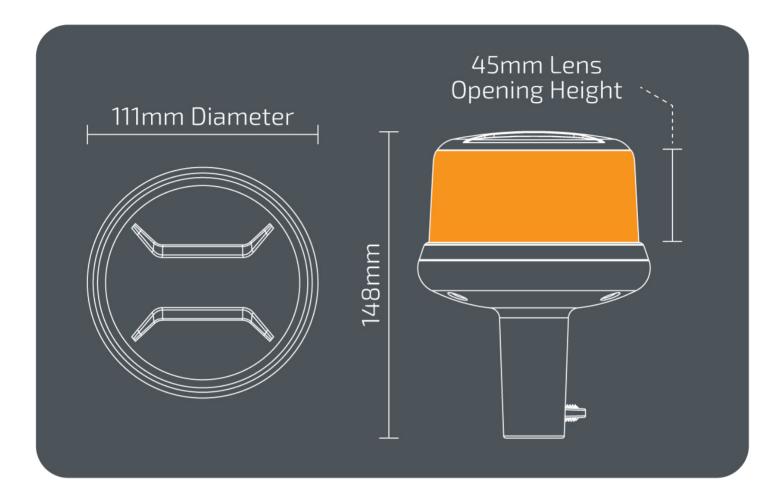

#### **Electrical Specifications**

Input Voltage	12-24V DC
Operating Voltage	12-24V DC
Wattage	16 W
Current Draw	1.7AA @ 13.8V DC 1.0AA @ 24V DC





#### Additional Specifications

IP Rating	IP67
Warranty	3 Years
Certification	EMI: CISPR 25 Class 3, ECE R10 - Operation: ECE R65 Class 1 & SAEJ845 Class 1
Pack Quantity	1 Beacon

#### Installation & Application Information

#### **Flash Modes**

Note: This product does have mode memory

	, , ,
	Single Flash – 2.1Hz 126 Flash / Min – ECE R65 Class 1
	Single Flash – 1.25Hz 75 Flash / Min
***** **** *****	Double Flash
	Triple Flash
	Quadruple Flash
	Quintuple Flash
	Rotating
	Combo – Single / Triple Flash
4 5 7 8 6 6 8 8 9 8 9 8 8 1 5 9	Combo – Single / Quintuple Flash
	Strobe
4 5 5 4 4 6 10 10 10 10 10 10 10 10 10 10 10 10 10 10 10 10 1	Cruise / Solid On – 30% Brightness for night use



