

# NX3 - LED Mini Bars


## NX385

### Product Information

<b>Description</b>	LED 15" Amber Mini Bar - 12/24V Class 1 - Bolt Mount
<b>Height</b>	45.5 mm / 1.79 in
<b>Width</b>	381.4 mm / 15.02 in
<b>Depth</b>	220.4 mm / 8.68 in
<b>Outer Lens Material</b>	Hardcoated Polycarbonate
<b>Outer Lens Color</b>	Clear
<b>Housing Material</b>	Polycarbonate
<b>Housing Color</b>	Black
<b>Minimum Operating Temperature</b>	-30 °C
<b>Maximum Operating Temperature</b>	65 °C
<b>Connector or Wiring</b>	500mm hardwire fly lead
<b>Product Weight</b>	2.976241 lbs / 1.35 kgs



### Product Dimensions

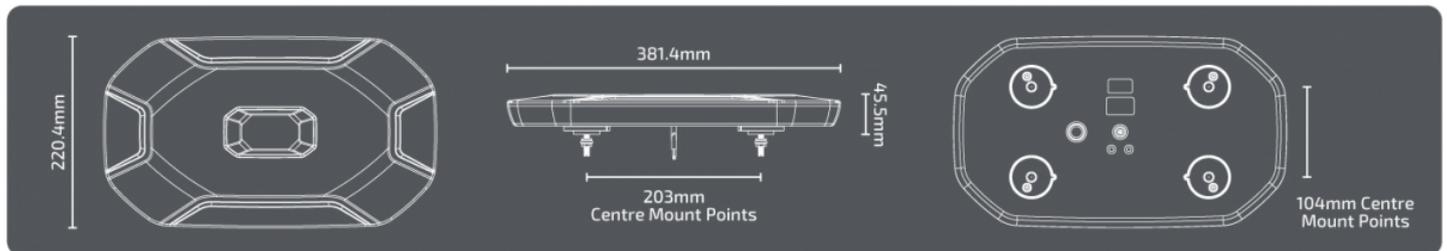

## Electrical Specifications

<b>Operating Voltage</b>	12-24V AC
<b>Red Wire</b>	Positive
<b>Black Wire</b>	Negative
<b>Yellow Wire</b>	Mode Select
<b>Current Draw</b>	3.1A @ 13.8V AC 1.7A @ 24V AC

## Additional Specifications

<b>IP Rating</b>	IPSpray - IP66, Submerge - IP67
<b>Warranty</b>	3 Years
<b>Certification</b>	EMI Approvals: CISPR25 Class 3, ECE R10. Class Approvals: ECE R65 Class 1, SAEJ845 Class 1
<b>Pack Quantity</b>	1

## Additional Information

### Flash Modes

- 1) Single Flash – ECE R65 Class 1 (125 FPM)
- 2) Single Flash (75 FPM)
- 3) Double Flash (125 FPM)
- 4) Triple Flash (125 FPM)
- 5) Rotating (122 FPM)
- 6) Combination Single / Triple Flash
- 7) Combination Single / Quint Flash
- 8) Triple Flash – Alternating Front, Back, In & Out
- 9) Triple Flash / Single Flash (Triple Flash – Alternating Front, Back, In & Out) (Single Flash – All)
- 10) Triple Flash / Single Flash / Rotating (Triple Flash – Alternating Front, Back, In & Out) (Single Flash – All) (Rotating – Final Sequence)
- 11) Strobe (600 FPM)
- 12) Cruise – 30% Brightness For Night Use