

NX3 - LED Mini Bars


NX387

Product Information

Description	LED 12.5" Slimline Amber Mini Bar - 12/24V Class 1 - Bolt Mount
Height	25.5 mm / 1 in
Width	317 mm / 12.48 in
Depth	221 mm / 8.7 in
Outer Lens Material	Hardcoated Polycarbonate
Outer Lens Color	Clear
Housing Material	Polycarbonate
Housing Color	Black
Minimum Operating Temperature	-30 °C
Maximum Operating Temperature	65 °C
Connector or Wiring	500mm hardwire fly lead
Product Weight	3.5274 lbs / 1.6 kgs



Product Dimensions

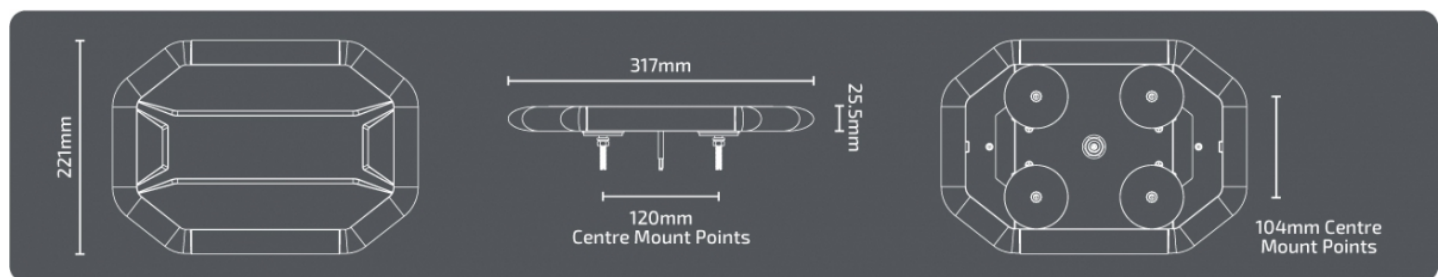

Electrical Specifications

Operating Voltage	12-24V AC
Red Wire	Positive
Black Wire	Negative
Yellow Wire	Mode Select
Current Draw	3.6A @ 13.8V AC 1.9A @ 24V AC

Additional Specifications

IP Rating	IPSpray - IP66, Submerge - IP67
Warranty	3 Years
Certification	EMI Approvals: CISPR25 Class 3, ECE R10. Class Approvals: ECE R65 Class 2, SAEJ845 Class 1
Pack Quantity	1

Additional Information

Flash Modes

- 1) Single Flash – ECE R65 Class 2 (125 FPM)
- 2) Single Flash By Night (125 FPM)
- 3) Double Flash – ECE R65 Class 2 (125 FPM)
- 4) Triple Flash – Alternating Front & Back / All (22 FMP)
- 5) Triple Flash – Alternating Middle & Ends / All (22 FMP)
- 6) Combination Single / Quad Flash (53 FPM)
- 7) Single Flash – Alternating Left & Right Half (130 FPM)
- 8) Tracking Flash – Alternating In & Out (75 FPM)
- 9) Tracking Flash (150 FPM)
- 10) Cruise – 30% Brightness For Night Use
- 11) Center Arrow (75 FPM)
- 12) Left Arrow (37.5 FPM)
- 13) Right Arrow (37.5 FPM)