# NX3 - LED Mini Bars


# NX388

## Product Information

| | |
|---|---|
| **Description** | LED 12.5" Slimline Amber Mini Bar - 12/24V Class 1 - Magnetic Mount w/ 12V Vehicle Plug |
| **Height** | 25.5 mm / 1 in |
| **Width** | 317 mm / 12.48 in |
| **Depth** | 221 mm / 8.7 in |
| **Outer Lens Material** | Hardcoated Polycarbonate |
| **Outer Lens Color** | Clear |
| **Housing Material** | Polycarbonate |
| **Housing Color** | Black |
| **Minimum Operating Temperature** | -30 °C |
| **Maximum Operating Temperature** | 65 °C |
| **Connector or Wiring** | 2.5m hardwire with 12V vehicle plug |
| **Product Weight** | 3.96832 lbs / 1.8 kgs |



## Product Dimensions

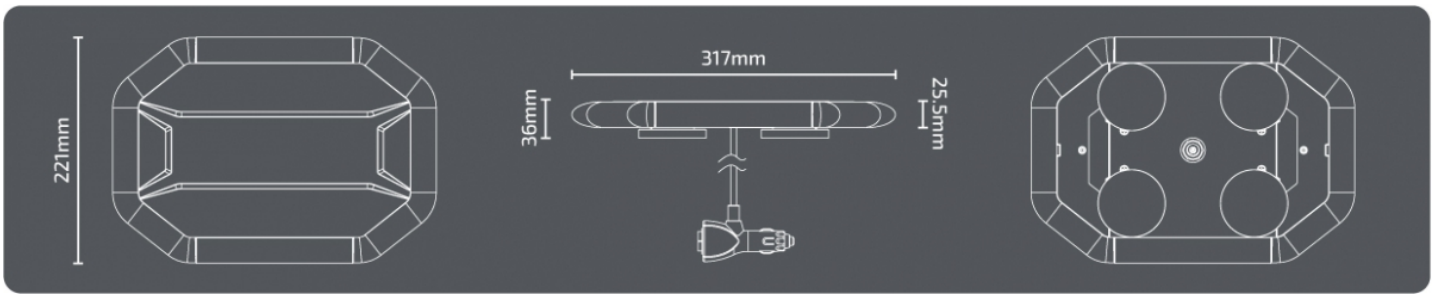


Copyright © 2026 Invision Sales Pty. Ltd.

## Electrical Specifications

| | |
|---|---|
| **Operating Voltage** | 12-24V AC |
| **Red Wire** | Positive |
| **Black Wire** | Negative |
| **Yellow Wire** | Mode Select |
| **Current Draw** | 3.6A @ 13.8V AC<br>1.9A @ 24V AC |

## Additional Specifications

| | |
|---|---|
| **IP Rating** | IPSpray - IP66, Submerge - IP67 |
| **Warranty** | 3 Years |
| **Certification** | EMI Approvals: CISPR25 Class 3,<br>ECE R10. Class Approvals: ECE R65<br>Class 2, SAEJ845 Class 1 |
| **Pack Quantity** | 1 |

## Additional Information

### Flash Modes

1) Single Flash – ECE R65 Class 2 (125 FPM)
2) Single Flash By Night (125 FPM)
3) Double Flash – ECE R65 Class 2 (125 FPM)
4) Triple Flash – Alternating Front & Back / All (22 FMP)
5) Triple Flash – Alternating Middle & Ends / All (22 FMP)
6) Combination Single / Quad Flash (53 FPM)
7) Single Flash – Alternating Left & Right Half (130 FPM)
8) Tracking Flash – Alternating In & Out (75 FPM)
9) Tracking Flash (150 FPM)
10) Cruise – 30% Brightness For Night Use
11) Center Arrow (75 FPM)
12) Left Arrow (37.5 FPM)
13) Right Arrow (37.5 FPM)

Copyright © 2026 Invision Sales Pty. Ltd.