

LED Stop, Tail, Turn & Backup Light – Model 265

0342421




Product Information

| | |
|--------------------------------------|--|
| Description | Model 265 - 12/24V LED Signal Light - Red, White & Amber (Stop, Tail, Turn Signal & Reverse) |
| Height | 136.65 mm / 5.38 in |
| Width | 287.53 mm / 11.32 in |
| Depth | 33.78 mm / 1.33 in |
| Shape | Rectangular |
| Outer Lens Material | Acrylic |
| Housing Material | ABS |
| Housing Color | Black |
| Mounting Hardware Description | (x2) M6-1 x 25mm Mounting Bolts |
| Mounting Type | Low Profile Mount |
| Minimum Operating Temperature | -40 °C |
| Maximum Operating Temperature | 65 °C |
| Connector or Wiring | 6-Pin Deutsch Socket (DT04-6P-E004); Others available |
| Mating Connector | 6-Pin Deutsch Plug (DT06-6S); Others Available |
| Product Weight | 1.34 lbs / 0.61 kgs |
| Shipping Weight | 1.34 lbs / 0.61 kgs |



Product Dimensions

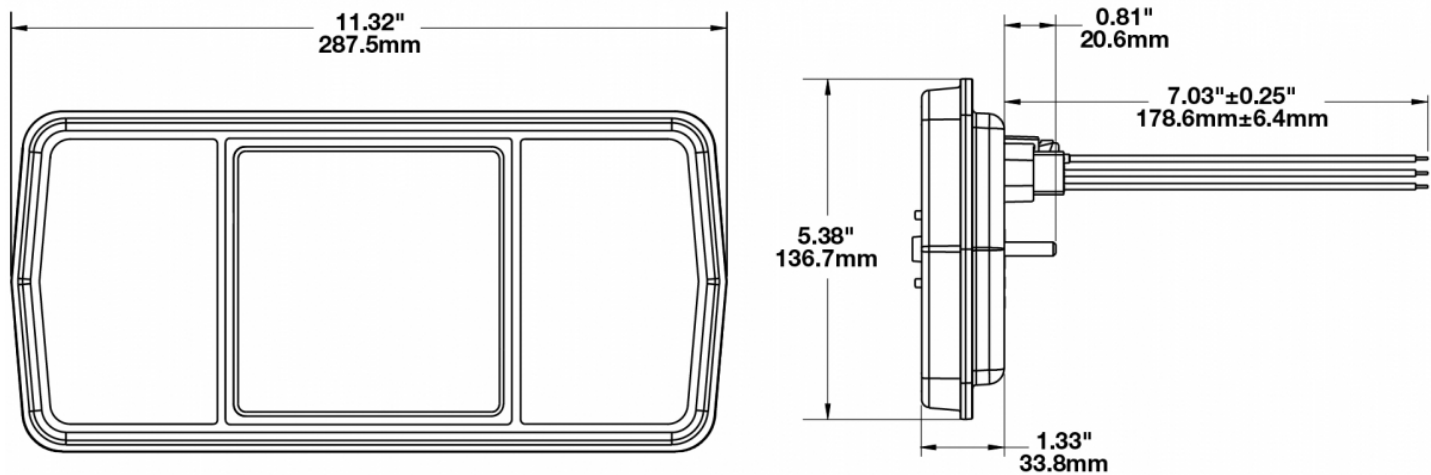

Electrical Specifications

| | |
|----------------------|--|
| Input Voltage | 12-24V DC |
| White Wire | Reverse |
| Yellow Wire | Turn |
| Red Wire | Stop |
| Brown Wire | Tail |
| Black Wire | Ground |
| Current Draw | 0.325A @ 12V DC (Stop) 0.200A @ 24V DC (Stop) 0.060A @ 12V DC (Tail) 0.035A @ 24V DC (Tail) 0.425A @ 12V DC (Turn) 0.325A @ 24V DC (Turn) 0.325A @ 12V DC (Reverse) 0.350A @ 24V DC (Reverse) |

Photometric Specifications

| | |
|------------------------|---|
| Beam Pattern(s) | Signalization - Stop Signalization - Tail Signalization - Turn (Front) Signalization - Turn (Rear) |
|------------------------|---|

Additional Specifications



| | |
|---------------|---|
| IP Rating | IP67 |
| Warranty | Please refer to the Warranty Statement which is available for download on the website |
| Certification | ECE Reg 3, 6, 7 & 23. SAEJ575, 585, 586, 588, 593, 594, 2040 & 2261. FMVSS 108 Table VII, VIII, IX, XII & XVI |
| Pack Quantity | 1 |