

LED Stop, Tail, Turn & Backup Light – Model 265

0342421




Product Information

Description	Model 265 - 12/24V LED Signal Light - Red, White & Amber (Stop, Tail, Turn Signal & Reverse)
Height	136.65 mm / 5.38 in
Width	287.53 mm / 11.32 in
Depth	33.78 mm / 1.33 in
Shape	Rectangular
Outer Lens Material	Acrylic
Housing Material	ABS
Housing Color	Black
Mounting Hardware Description	(x2) M6-1 x 25mm Mounting Bolts
Mounting Type	Low Profile Mount
Minimum Operating Temperature	-40 °C
Maximum Operating Temperature	65 °C
Connector or Wiring	6-Pin Deutsch Socket (DT04-6P-E004); Others available
Mating Connector	6-Pin Deutsch Plug (DT06-6S); Others Available
Product Weight	1.34 lbs / 0.61 kgs
Shipping Weight	1.34 lbs / 0.61 kgs



Product Dimensions

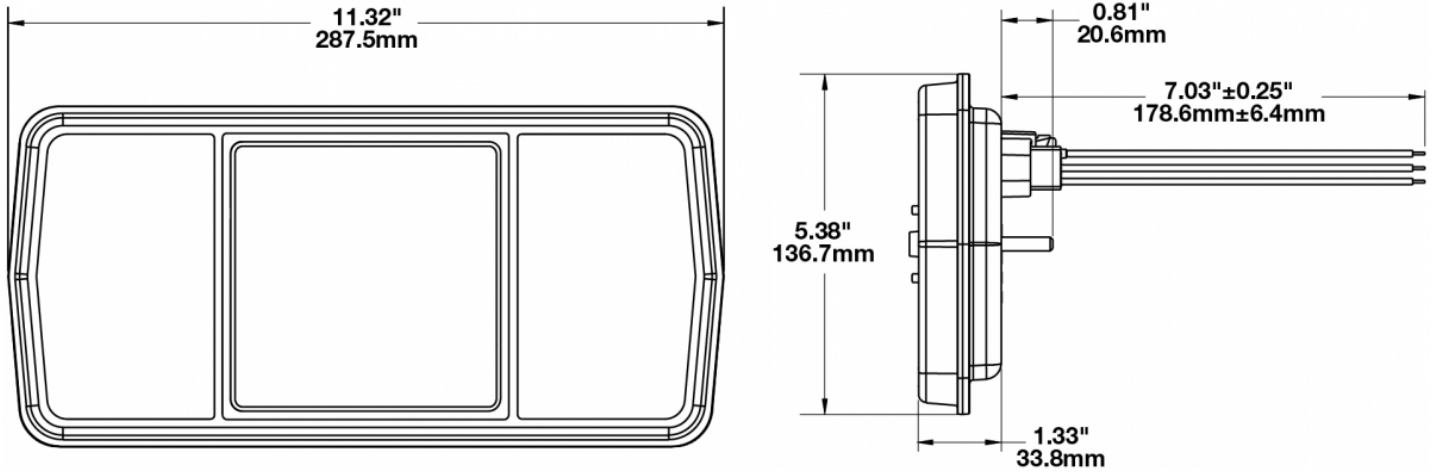

Electrical Specifications

Input Voltage	12-24V DC
White Wire	Reverse
Yellow Wire	Turn
Red Wire	Stop
Brown Wire	Tail
Black Wire	Ground
Current Draw	0.325A @ 12V DC (Stop) 0.200A @ 24V DC (Stop) 0.060A @ 12V DC (Tail) 0.035A @ 24V DC (Tail) 0.425A @ 12V DC (Turn) 0.325A @ 24V DC (Turn) 0.325A @ 12V DC (Reverse) 0.350A @ 24V DC (Reverse)

Photometric Specifications

Beam Pattern(s)	Signalization - Stop Signalization - Tail Signalization - Turn (Front) Signalization - Turn (Rear)
------------------------	-------------------------------------------------------------------------------------------------------------

Additional Specifications



IP Rating	IP67
Warranty	Please refer to the Warranty Statement which is available for download on the website
Certification	ECE Reg 3, 6, 7 & 23. SAEJ575, 585, 586, 588, 593, 594, 2040 & 2261. FMVSS 108 Table VII, VIII, IX, XII & XVI
Pack Quantity	1