

# LED Headlights – Model 6130 Evolution


## 0549861

### Product Information

<b>Description</b>	Model 6130 EVO - 12/24V LED Headlight Insert (Low Beam & DRL)
<b>Height</b>	120.40 mm / 4.74 in
<b>Width</b>	120.40 mm / 4.74 in
<b>Depth</b>	81.53 mm / 3.21 in
<b>Shape</b>	Round
<b>Outer Lens Material</b>	Polycarbonate
<b>Outer Lens Color</b>	Clear
<b>Housing Color</b>	Black
<b>Bezel Color</b>	Black
<b>Connector or Wiring</b>	12" Flying Leads
<b>Mating Connector</b>	n/a
<b>Product Weight</b>	1.50 lbs / 0.68 kgs



### Product Dimensions

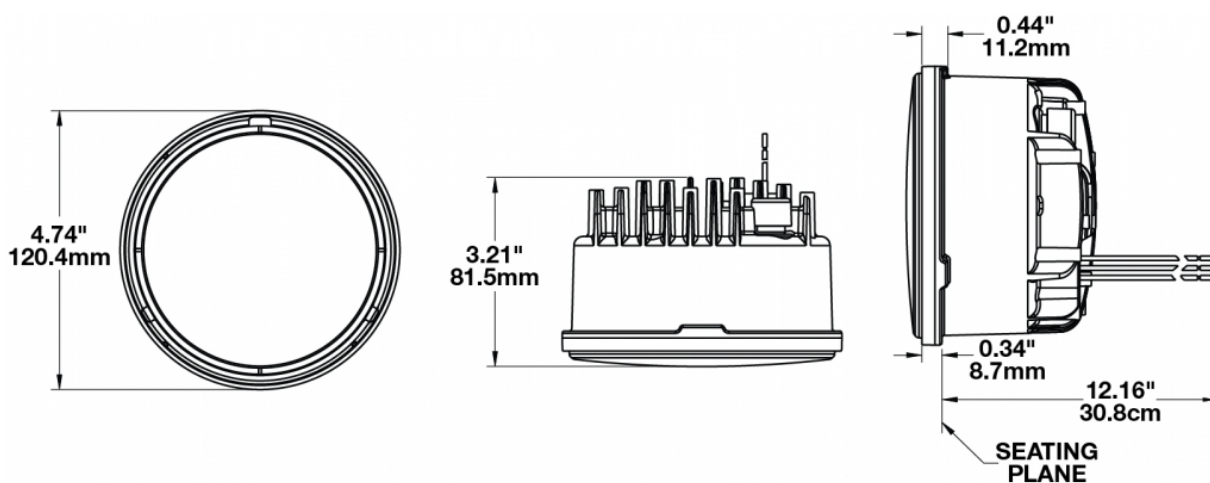


Electrical Specifications

Input Voltage	12-24V DC
Operating Voltage	10-30V DC
Black Wire	Ground
Yellow Wire	DRL
White Wire	Low Beam
Current Draw	2.07A @ 12V DC (Low Beam) 0.96A @ 24V DC (Low Beam) 0.44A @ 12V DC (DRL) 0.24A @ 24V DC (DRL)

Photometric Specifications

Raw Lumen Output	1,690 (Low Beam)
Effective Lumen Output	640 (Low Beam)
Beam Pattern(s)	Forward Lighting - Daytime Running Light Forward Lighting - Low Beam (ECE Left Hand)

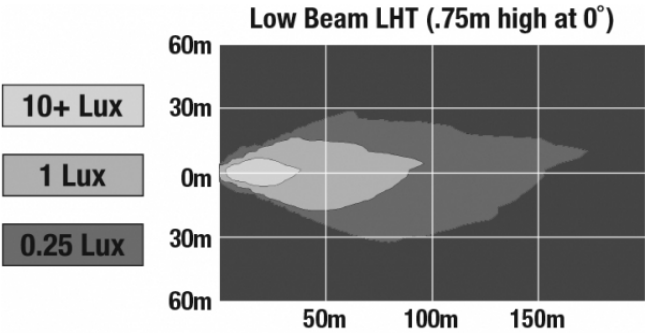

Additional Specifications

IP Rating	IP67
Warranty	Please refer to the Warranty Statement which is available for download on the website
Certification	ECE Reg 7, 87 & 112
Pack Quantity	1

## Additional Information

---



Jump Start: 48V for 2 min  
Reverse Polarity: -24V for 2 min  
Load Dump: 150V 5 pulses 10 sec intervals  
Inductive Switching: 600V 10 pulses 1 sec intervals  
Mutual Coupling: 300V 10 pulses 1 sec intervals