

# LED Headlight – Model 8630 Evolution


## 0549921

### Product Information

<b>Description</b>	Model 8630 EVO - 12/24V LED Headlight Insert
<b>Height</b>	142.24 mm / 5.6 in
<b>Width</b>	142.24 mm / 5.6 in
<b>Depth</b>	86.36 mm / 3.4 in
<b>Shape</b>	Round
<b>Outer Lens Material</b>	Polycarbonate
<b>Outer Lens Color</b>	Clear
<b>Housing Color</b>	Black
<b>Minimum Operating Temperature</b>	-34 °C
<b>Maximum Operating Temperature</b>	49 °C
<b>Connector or Wiring</b>	Integral Connector in Housing simulating Delphi 12124107
<b>Mating Connector</b>	Delphi 12052848
<b>Product Weight</b>	1.76 lbs / 0.8 kgs



### Product Dimensions

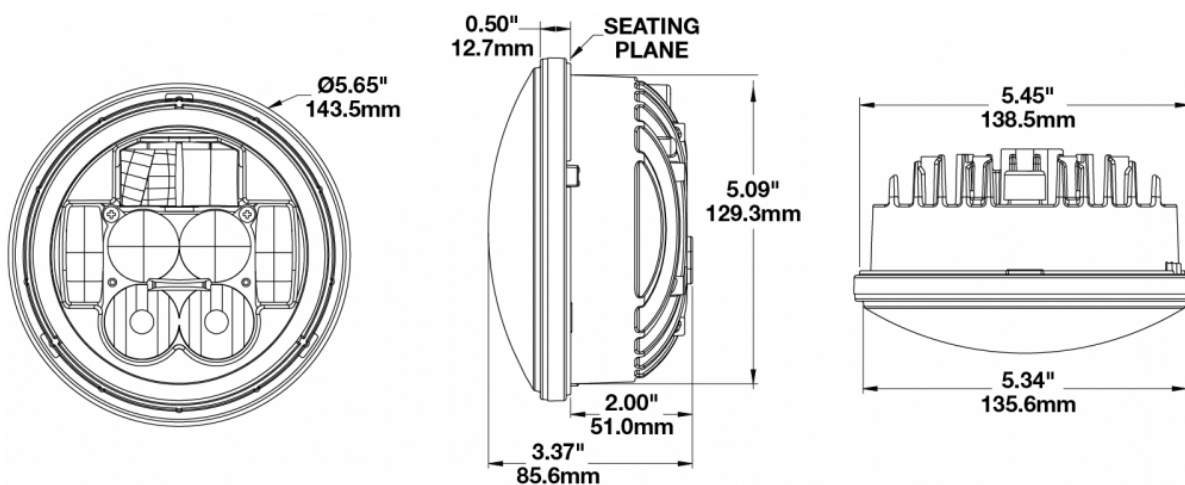


Electrical Specifications

Input Voltage	12-24V DC
Operating Voltage	10-32V DC
Yellow Wire	Low Beam
White Wire	High Beam
Black Wire	Ground
Red Wire	Front Position
Purple Wire	DRL
Current Draw	2.20A @ 12V DC (Low Beam) 0.68A @ 14V DC (DRL) 0.38A @ 24V DC (DRL) 1.70A @ 14V DC (Low Beam) 1.10A @ 24V DC (Low Beam) 3.50A @ 12V DC (High Beam) 2.70A @ 14V DC (High Beam) 1.70A @ 24V DC (High Beam) 0.09A @ 12V DC (Front Position) 0.07A @ 14V DC (Front Position) 0.04A @ 24V DC (Front Position) 0.90A @ 12V DC (DRL)

Photometric Specifications

Raw Lumen Output	2,925 (High Beam); 2,025 (Low Beam)
Effective Lumen Output	1,000 (High Beam); 630 (Low Beam)
Candela Output	61,684 (High Beam); 19,162 (Low Beam)
Nominal LED Color Temperature	5000 K
Beam Pattern(s)	Forward Lighting - Daytime Running Light Forward Lighting - High Beam (DOT/ECE) Forward Lighting - Low Beam (ECE Left Hand) Signalization - Front Position

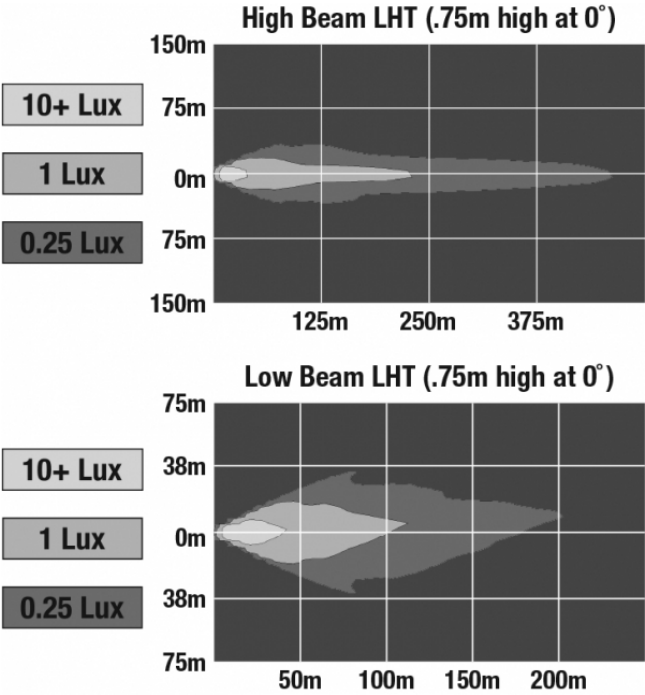

Additional Specifications



IP Rating	IP67
Warranty	Please refer to the Warranty Statement which is available for download on the website
Certification	ECE Reg 7, 87 & 112
Pack Quantity	1