



×

LED High Beam Headlight – Model 8710 0550011

Product Information

Description

| | insert (High Bearr | | |
|-------------------------------|--------------------|--|--|
| Height | 177.80 mm / 7 in | | |
| Width | 177.80 mm / 7 in | | |
| Shape | Round | | |
| Outer Lens Material | Polycarbonate | | |
| Outer Lens Color | Clear | | |
| Housing Color | Black | | |
| Bezel Color | Chrome | | |
| Retrofits | PAR 56 High Bear | | |
| Minimum Operating Temperature | -40 °C | | |
| Maximum Operating Temperature | 66 °C | | |
| Connector or Wiring | H4 | | |
| Mating Connector | AMP#172615-2 | | |
| Product Weight | 2.20 lbs / 1 kgs | | |
| Shipping Weight | 3.10 lbs / 1.41 kg | | |
| | | | |

Model 8710 - 12/24V LED Headlight Insert (High Beam Only) - Chrome 177.80 mm / 7 in Round Polycarbonate Clear Black Chrome PAR 56 High Beam -40 °C 66 °C H4 AMP# 172615-2 2.20 lbs / 1 kgs 3.10 lbs / 1.41 kgs










Product Dimensions

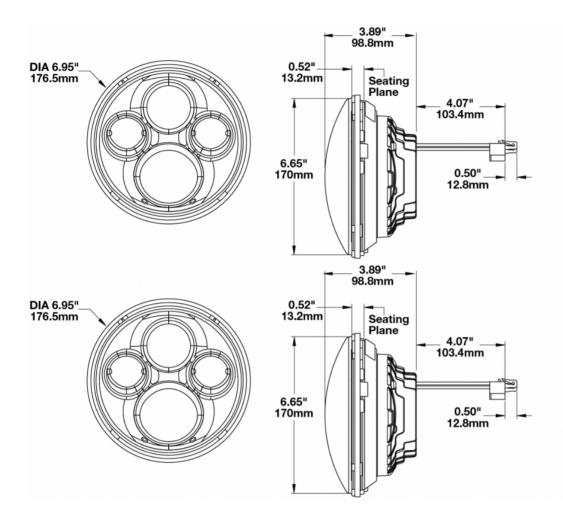

Electrical Specifications

| Input Voltage | 12-24V DC | | |
|-------------------|----------------------------------|--|--|
| Operating Voltage | 9-32V DC | | |
| Black Wire | Ground | | |
| white Wire | Positive | | |
| Current Draw | 4.80A @ 12V DC 2.50A @ 24V DC | | |

 \checkmark

 \checkmark



Photometric Specifications

| Raw Lumen Output Effective Lumen Output | 3,300 1,440 | | 240m | High Bea | m (.75m h | iigh at 0°) |
|---|------------------------------------|----------|--------|----------|-----------|-------------|
| Candela Output Nominal LED Color Temperature | 133,000 5000 K | 10+ Lux |] 120m | | | |
| Beam Pattern(s) | Forward Lighting - High Beam (ECE) | 1 Lux |] Om | | | |
| | | 0.25 Lux | 120m | | | |
| | | | 240m | 200m | 400m | 600m |

Additional Specifications

| IP Rating | |
|-----------|--|
| Warranty | |

Certification Pack Quantity IP67 Please refer to the Warranty Statement which is available for download on the website ECE Reg 112

1





×

×



