



LED Auxiliary Lights - Model TS4000

0551603



Description Model TS4000 - 12/24V LED Driving

Light (8710 Pedestal Mount) -

Chrome

 Height
 177.80 mm / 7 in

 Width
 177.80 mm / 7 in

 Depth
 99.06 mm / 3.9 in

Shape Round

Outer Lens Material Polycarbonate

Outer Lens ColorClearHousing ColorBlackBezel ColorChrome

Mounting Hardware Description (x1) 3/8"-16 x UNC


Minimum Operating Temperature $-40~^{\circ}\text{C}$ Maximum Operating Temperature $65~^{\circ}\text{C}$


Connector or Wiring Integral Deutsch DT04-2P


Mating ConnectorDT06-2SProduct Weight2.20 lbs / 1 kgsShipping Weight7.20 lbs / 3.27 kgs



Product Dimensions















Electrical Specifications

~

Input Voltage12-24V DCOperating Voltage9-32V DCBlack WireGroundRed WirePositive

Current Draw 4.80A @ 12V DC 2.50A @ 24V DC

Photometric Specifications


~

Raw Lumen Output 3,300 (High Beam) **Effective Lumen Output** 1,440 (High Beam)

Candela Output 133,000 **Nominal LED Color Temperature** 5000 K

Beam Pattern(s) Forward Lighting - Driving

Forward Lighting - High Beam (ECE)

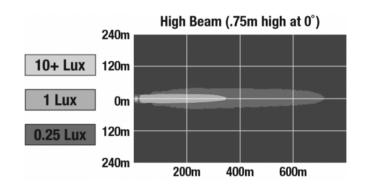

Additional Specifications

~

IP Rating IP67

Warranty Please refer to the Warranty

Statement which is available for

download on the website

Certification ECE Reg 112

Pack Quantity 2



