LED Headlight – Model 8631 Evolution


0551641

Product Information

Description	Model 8631 EVO - 12/24V LED Headlight Insert
Height	142.24 mm / 5.6 in
Width	142.24 mm / 5.6 in
Depth	86.36 mm / 3.4 in
Shape	Round
Outer Lens Material	Hardcoated Polycarbonate
Outer Lens Color	Clear
Housing Color	Black
Minimum Operating Temperature	-34 °C
Maximum Operating Temperature	49 °C
Connector or Wiring	Integral Connector in Housing simulating Delphi 12124107
Mating Connector	Delphi 12052848
Product Weight	1.76 lbs / 0.8 kgs



Product Dimensions

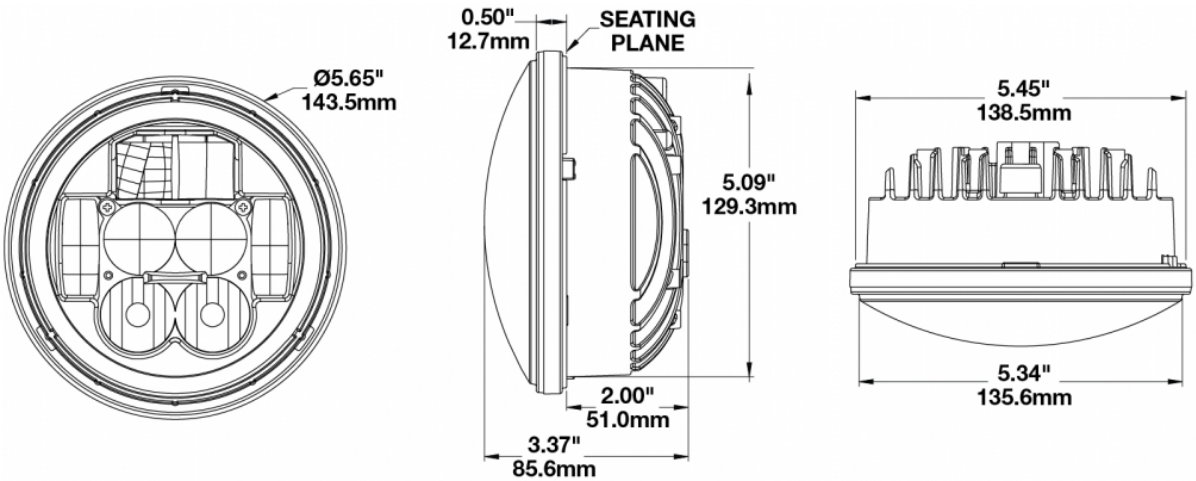


Copyright © 2026 Invision Sales Pty. Ltd.


Electrical Specifications

Input Voltage	12-24V DC
Operating Voltage	10-32V DC
White Wire	High Beam
Yellow Wire	Low Beam
Black Wire	Ground
Red Wire	Front Position
Purple Wire	DRL
Orange / White Wire	Front Turn
Current Draw	2.20A @ 12V DC (Low Beam) 1.10A @ 24V DC (Low Beam) 3.50A @ 12V DC (High Beam) 1.70A @ 24V DC (High Beam) 1.10A @ 12V DC (DRL) 0.70A @ 24V DC (DRL) 0.05A @ 12V DC (Front Position) 0.05A @ 24V DC (Front Position) 1.40A @ 12V DC (Front Turn) 0.70A @ 24V DC (Front Turn)

Photometric Specifications

Raw Lumen Output	2,925 (High Beam); 2,025 (Low Beam)
Effective Lumen Output	1,000 (High Beam); 630 (Low Beam)
Nominal LED Color Temperature	5000 K
Beam Pattern(s)	Forward Lighting - Daytime Running Light Forward Lighting - High Beam (DOT/ECE) Forward Lighting - Low Beam (ECE Left Hand) Signalization - Front Position Signalization - Turn (Front)

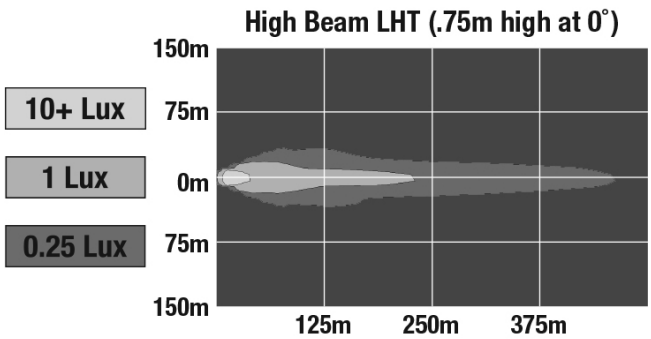

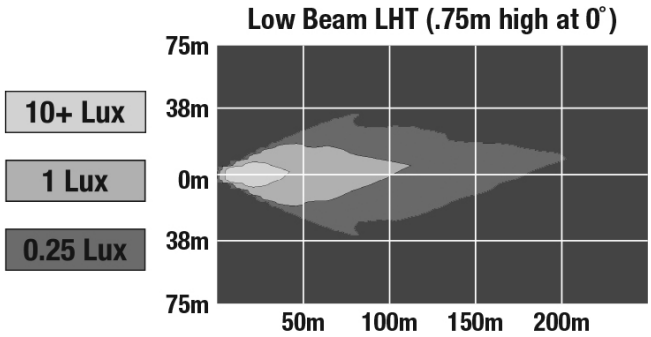

Copyright © 2026 Invision Sales Pty. Ltd.

Additional Specifications

IP Rating	IP67
Warranty	Please refer to the Warranty Statement which is available for download on the website
Certification	ECE Reg 6, 7, 87 & 112
Pack Quantity	1

Copyright © 2026 Invision Sales Pty. Ltd.