

## LED Work Light – Model 4415


0551753

Product Information 

|                                      |  |
|--------------------------------------|--|
| <b>Description</b>                   | Model 4415 - 12/24V LED Worklight<br>- Spot Beam (Mirror Kit - Left & Right) |
| <b>Height</b>                        | 110.00 mm / 4.33 in  |
| <b>Width</b>                         | 85.20 mm / 3.35 in   |
| <b>Depth</b>                         | 21.10 mm / 0.83 in   |
| <b>Shape</b>                         | Round  |
| <b>Housing Material</b>              | Die-Cast Aluminum  |
| <b>Housing Color</b>                 | Black  |
| <b>Mounting Hardware Description</b> | (x2) 0.500-13 x Bracket and Swivel   |
| <b>Minimum Operating Temperature</b> | -40 °C   |
| <b>Maximum Operating Temperature</b> | 85 °C  |
| <b>Connector or Wiring</b>           | Packard# 12084167  |
| <b>Mating Connector</b>              | Packard# 12059183  |
| <b>Product Weight</b>                | 1.00 lbs / 0.45 kgs  |
| <b>Shipping Weight</b>               | 2.30 lbs / 1.04 kgs  |
| <b>Additional Information</b>        | Kit includes 2 lights and necessary mounting hardware.                       |



## Product Dimensions

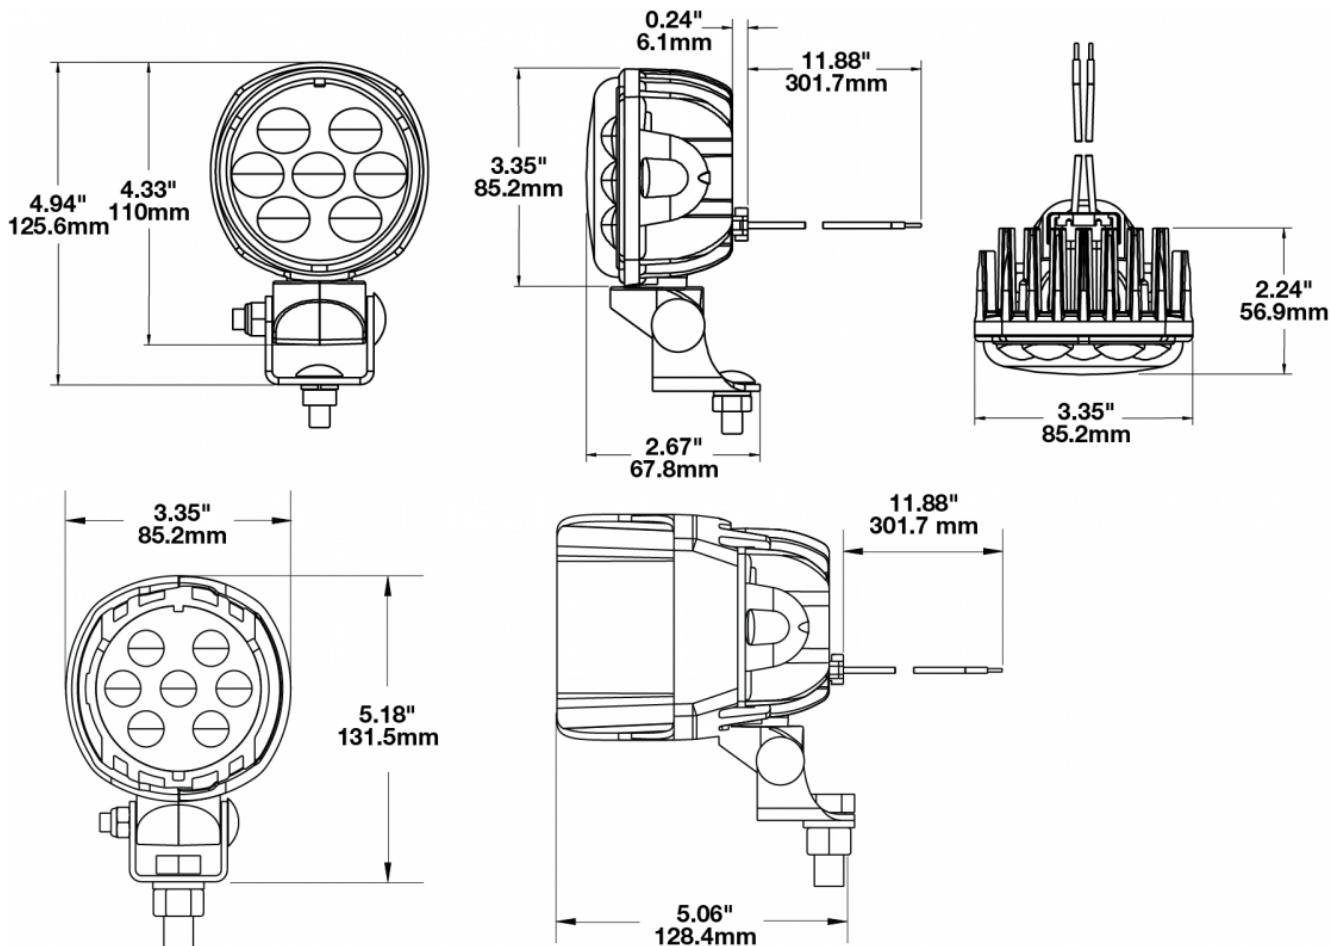

## Electrical Specifications

|                          |                                |
|--------------------------|--------------------------------|
| <b>Input Voltage</b>     | 12-24V AC                      |
| <b>Operating Voltage</b> | 10-32V AC                      |
| <b>Red Wire</b>          | Positive                       |
| <b>Black Wire</b>        | Negative                       |
| <b>Current Draw</b>      | 2.2A @ 12V AC<br>1.1A @ 24V AC |

## Photometric Specifications

|                                      |                         |
|--------------------------------------|-------------------------|
| <b>Raw Lumen Output</b>              | 2,450                   |
| <b>Effective Lumen Output</b>        | 1,350                   |
| <b>Nominal LED Color Temperature</b> | 5000 K                  |
| <b>Beam Pattern(s)</b>               | Forward Lighting - Spot |

Model 4415 - Spot Beam



Beam Measurements - 1 Lux

Lamp Mounting: 2.15m High -10° Down

## Additional Specifications

|                      |   |
|----------------------|---|
| <b>IP Rating</b>     | IP67  |
| <b>Warranty</b>      | Please refer to the Warranty Statement which is available for download on the website |
| <b>Pack Quantity</b> | 2   |

## Installation & Application Information



This kit is intended to be mounted on the side mirrors or forward of the driver with the shroud (snoot) oriented to block the light from the driver / operator's eyes, providing maximum visibility rearward.

The kit can also be mounted elsewhere on the truck, such as on the back or side of a sleeper cab, to provide additional lighting.