



Reflector LED Headlights – Model 8720 0552861

Product Information


Description

Height
Width
Depth
Shape
Outer Lens Material
Outer Lens Color
Housing Color
Bezel Color
Retrofits
Copportor or Wiring

Connector or Wiring Mating Connector Shipping Weight Additional Information Model 8720 - 12V LED Motorcycle Headlight Insert 175.00 mm / 6.89 in 175.00 mm / 6.89 in 110.00 mm / 4.33 in Round Polycarbonate Clear Black Chrome Bucket 7" Round Headlights (PAR56) H4 H4 AMP#172615-2 2.74 lbs / 1.24 kgs Includes H-4 connector with 4th front position wire for ECEcompliance.



Product Dimensions

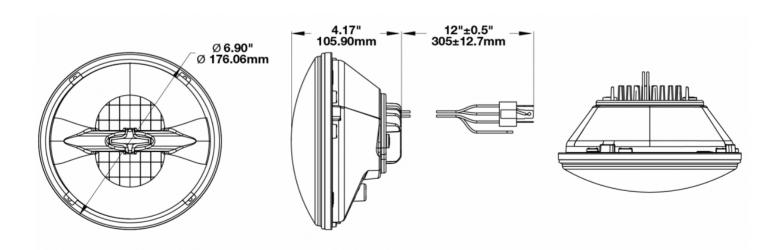








Electrical Specifications

Input Voltage	12V DC
Operating Voltage	9-16V DC
Black Wire	Ground
White Wire	High Beam
Yellow Wire	Low Beam
Red Wire	Front Position
Current Draw	2.67A @ 12V DC (High Beam) 1.67A @ 12V DC (Low Beam) 0.13A @ 12V DC (Front Position)

Photometric Specifications

Raw Lumen Output Effective Lumen Output Candela Output	1,620 (High Beam); 925 (Low Beam) 850 (High Beam); 500 (Low Beam) 41,000 (High Beam); 12,110 (Low Beam)
Nominal LED Color Temperature	5000 K
Beam Pattern(s)	Forward Lighting - High Beam (DOT/ECE) Forward Lighting - Low Beam (DOT/ECE) Signalization - Front Position

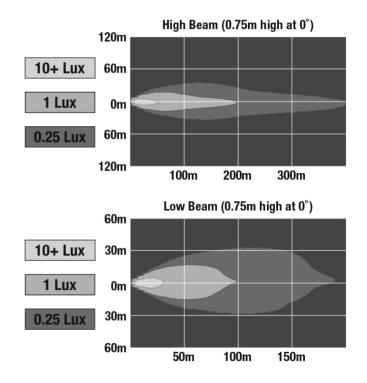



×

V



Additional Specifications

IP Rating	IP67
Warranty	Please refer to the Warranty Statement which is available for download on the website
Certification	ECE Reg 50 & 113, Tested to ECE Reg 10 (Radiated Emissions Only), FMVSS 108 Table XX, SAEJ584
Pack Quantity	1

 \checkmark



