


LED Work Light – Model 783 XD


1603391

Product Information

| | |
|--------------------------------------|---|
| Description | Model 783XD - 12/48V LED Worklight - Flood Beam |
| Height | 54.10 mm / 2.13 in |
| Width | 169.67 mm / 6.68 in |
| Depth | 45.21 mm / 1.78 in |
| Outer Lens Material | Polycarbonate |
| Outer Lens Color | Clear |
| Housing Material | Polycarbonate |
| Housing Color | Black |
| Mounting Hardware Description | (x1) 3/8"-16 x 1.5" Mounting Bolt |
| Minimum Operating Temperature | -40 °C |
| Maximum Operating Temperature | 65 °C |
| Connector or Wiring | Integral DT04-2P |
| Mating Connector | Deutsch DT06-2S |
| Product Weight | 1.00 lbs / 0.45 kgs |
| Shipping Weight | 3.40 lbs / 1.54 kgs |

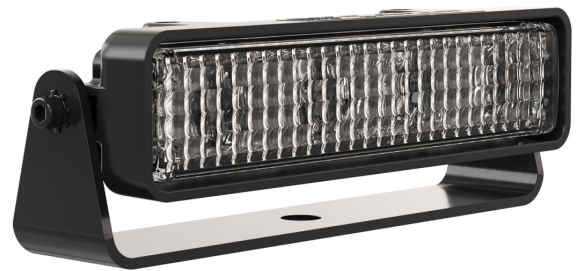

Product Dimensions

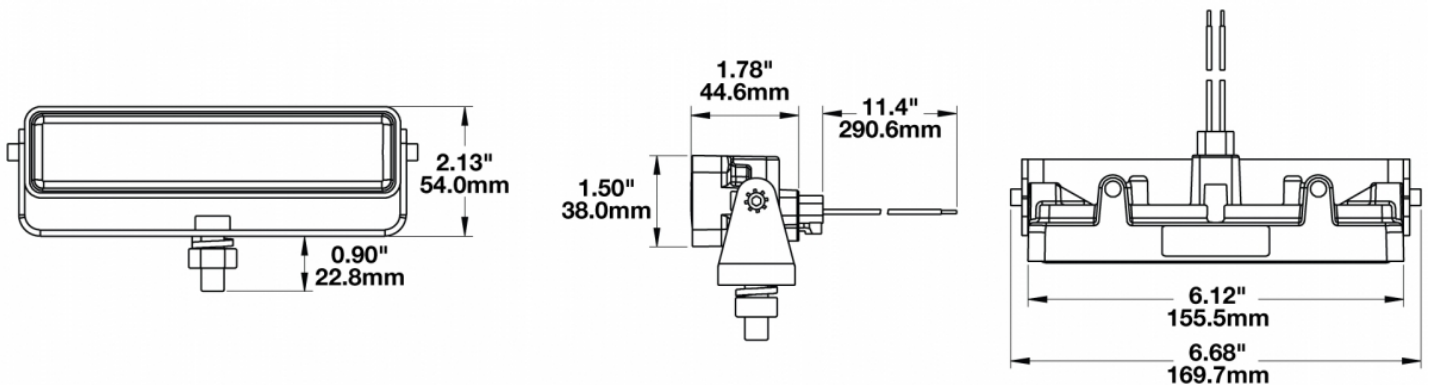


Electrical Specifications

| | |
|-----------------------------------|--|
| Input Voltage | 12-48V DC |
| Operating Voltage | 9-60V DC |
| Transient Spike Protection | 330V Peak @ 1 HZ-100 Pulses |
| Red Wire | Positive |
| Black Wire | Negative |
| Current Draw | 1.00A @ 12V DC (Flood) 0.50A @ 24V DC (Flood) 0.30A @ 36V DC (Flood) 0.25A @ 48V DC (Flood) |

Photometric Specifications

| | |
|--------------------------------------|-----------------------------------|
| Raw Lumen Output | 675 |
| Effective Lumen Output | 485 |
| Candela Output | 1,409 |
| Nominal LED Color Temperature | 5000 K |
| Beam Pattern(s) | Forward Lighting - Flood (Medium) |

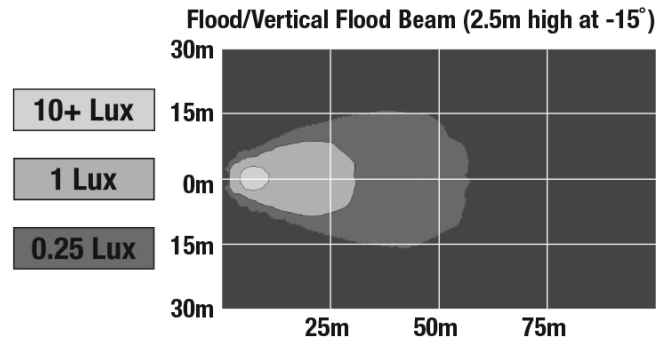

Additional Specifications

| | |
|----------------------|---|
| IP Rating | IP67 |
| Warranty | Please refer to the Warranty Statement which is available for download on the website |
| Certification | CISPR 12 |
| Pack Quantity | 1 |