

LED Material Handling Safety Light – Model 770 RED


1706441

Product Information

| | |
|--------------------------------------|--|
| Description | Model 770 - 12/110V LED Safety Light - Red 'Keep Out Zone' |
| Height | 137.16 mm / 5.4 in |
| Width | 144.27 mm / 5.68 in |
| Depth | 87.88 mm / 3.46 in |
| Shape | Oval |
| Outer Lens Material | Polycarbonate |
| Outer Lens Color | Clear |
| Housing Material | Polycarbonate |
| Housing Color | Black |
| Mounting Hardware Description | (x1) M10-1.5 x 25mm |
| Mounting Type | Universal Pedestal Mount |
| Minimum Operating Temperature | -40 °C |
| Maximum Operating Temperature | 65 °C |
| Connector or Wiring | Integrated |
| Mating Connector | AMP (#180923) |
| Product Weight | 1.31 lbs / 0.59 kgs |
| Shipping Weight | 1.31 lbs / 0.59 kgs |



Product Dimensions

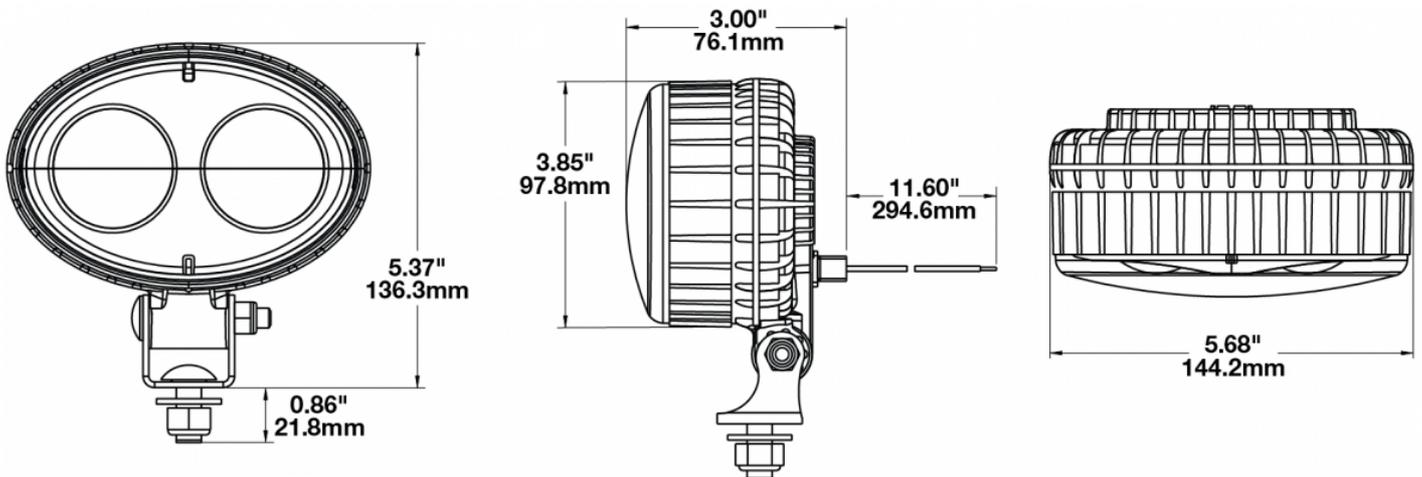

Electrical Specifications



| | |
|--------------------------|---|
| Input Voltage | 12-110V DC |
| Operating Voltage | 9-120V DC |
| Red Wire | Positive |
| Black Wire | Negative |
| Current Draw | 0.19A @ 12V DC 0.05A @ 60V DC 0.04A @ 110V DC 0.14A @ 48V DC |

Photometric Specifications



| | |
|--------------------------------------|-------------------------|
| Nominal LED Color Temperature | 5000 K |
| Beam Pattern(s) | Forward Lighting - Spot |

Additional Specifications



| | |
|----------------------|---|
| IP Rating | IP69K |
| Warranty | Please refer to the Warranty Statement which is available for download on the website |
| Certification | SAEJ1455, Tested to ECE Reg 10 (Radiated Emissions Only) |
| Pack Quantity | 1 |