

LED Work Light – Model 735

1706581


Product Information



| | |
|--------------------------------------|---|
| Description | Model 735 - 12/24V LED Worklight - Trap Beam |
| Height | 137.16 mm / 5.4 in |
| Width | 144.27 mm / 5.68 in |
| Depth | 66.04 mm / 2.6 in |
| Shape | Oval |
| Outer Lens Material | Polycarbonate |
| Outer Lens Color | Clear |
| Housing Material | Die-Cast Aluminum |
| Housing Color | Black |
| Mounting Hardware Description | (x1) 5/16"-18 x 0.58" Mounting Bolt |
| Mounting Type | Universal Pedestal Mount |
| Minimum Operating Temperature | -40 °C |
| Maximum Operating Temperature | 65 °C |
| Connector or Wiring | Integrated 2-Pin Deutsch Weather-Proof Socket (DT04-2P) |
| Mating Connector | 2-Pin Deutsch Weather-Proof Plug (DT06-2S) |
| Product Weight | 1.55 lbs / 0.7 kgs |
| Shipping Weight | 1.87 lbs / 0.85 kgs |



Product Dimensions

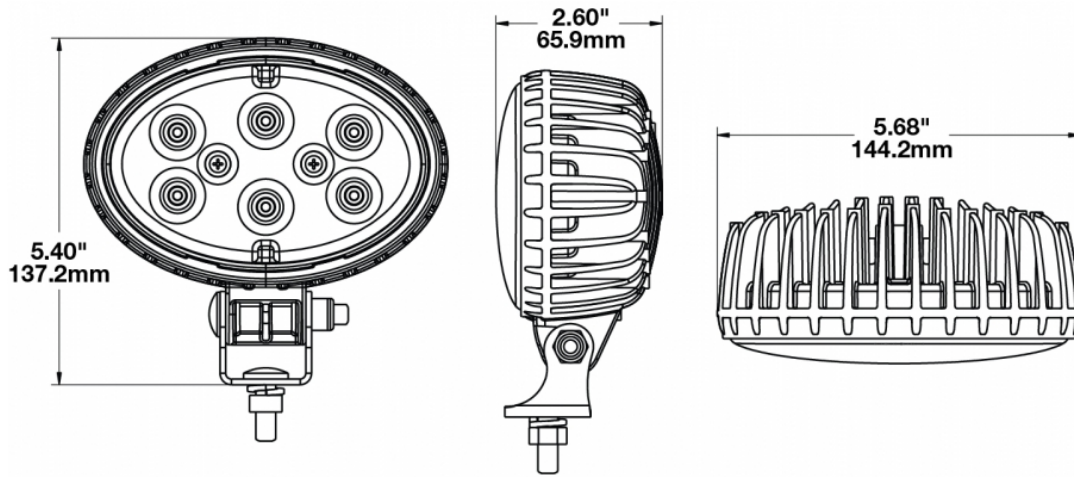

Electrical Specifications


| | |
|--------------------------|----------------------------------|
| Input Voltage | 12-24V DC |
| Operating Voltage | 10-36V DC |
| Red Wire | Positive |
| Black Wire | Negative |
| Current Draw | 3.50A @ 12V DC 1.75A @ 24V DC |

Photometric Specifications



| | |
|--------------------------------------|------------------------------|
| Raw Lumen Output | 3,900 |
| Effective Lumen Output | 2,700 |
| Nominal LED Color Temperature | 5700 K |
| Beam Pattern(s) | Forward Lighting - Trapezoid |

Model 735 - Trap Beam

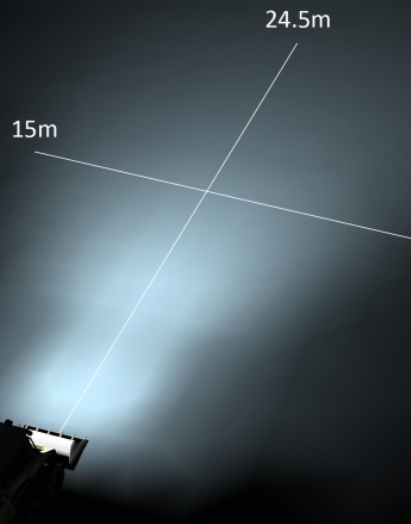

Beam Measurements - 1 Lux

Lamp Mounting: 2.15m High -10° Down

Additional Specifications



| | |
|----------------------|---|
| IP Rating | IP69K |
| Warranty | Please refer to the Warranty Statement which is available for download on the website |
| Pack Quantity | 1 |