## 



×

# LED Work Light – Model 735 1706591

#### Product Information

#### Description

	r lood Bealth
Height	137.16 mm / 5.4 in
Width	144.27 mm / 5.68 in
Depth	66.04 mm / 2.6 in
Shape	Oval
Outer Lens Material	Polycarbonate
Outer Lens Color	Clear
Housing Material	Die-Cast Aluminum
Housing Color	Black
Mounting Hardware Description	(x1) 5/16"-18 x 0.58" Mounting Bolt
Mounting Type	Universal Pedestal Mount
Minimum Operating Temperature	-40 °C
Maximum Operating Temperature	65 °C
Connector or Wiring	Integrated 2-Pin Deutsch Weather- Proof Socket (DT04-2P)
Mating Connector	2-Pin Deutsch Weather-Proof Plug (DT06-2S)
Product Weight	1.55 lbs / 0.7 kgs
Shipping Weight	1.87 lbs / 0.85 kgs

Model 735 - 12/24V LED Worklight -


Flood Beam







#### Product Dimensions

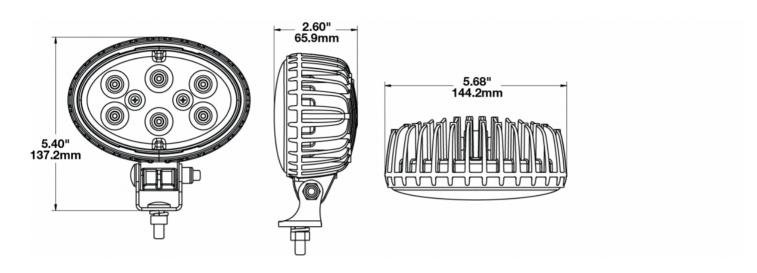

### **Electrical Specifications**

Input Voltage	12-24V DC
Operating Voltage	10-36V DC
Red Wire	Positive
Black Wire	Negative
Current Draw	3.50A @ 12V DC 1.75A @ 24V DC





×

×



#### Photometric Specifications

Raw Lumen Output Effective Lumen Output Nominal LED Color Temperature Beam Pattern(s)	3,900 2,600 5700 K Forward Lighting - Flood (Standard)	
Model 735 - Flood Beam		
	18.5m	
Beam Measurements - 1 Lux		Lamp Mounting: 2.15m High -10° Down

### Additional Specifications

IP Rating	IP69K
Warranty	Please refer to the Warranty Statement which is available for download on the website
Pack Quantity	1

