

LED Work Light – Model 7250 XD


1801521

Product Information

| | |
|--------------------------------------|--------------------------------------------------|
| Description | Model 7250XD - 12/24V LED Worklight - Flood Beam |
| Height | 152.40 mm / 6 in |
| Width | 170.18 mm / 6.7 in |
| Depth | 68.58 mm / 2.7 in |
| Shape | Oval |
| Outer Lens Material | Polycarbonate |
| Outer Lens Color | Clear |
| Housing Material | Polycarbonate |
| Housing Color | Black |
| Mounting Hardware Description | (x1) 3/8-16 x 1.5" Stainless Steel Hex Head Bolt |
| Minimum Operating Temperature | -40 °C |
| Maximum Operating Temperature | 65 °C |
| Connector or Wiring | Deutsch DT04-2P |
| Mating Connector | Deutsch DT06-2S |
| Shipping Weight | 2.80 lbs / 1.27 kgs |



Product Dimensions

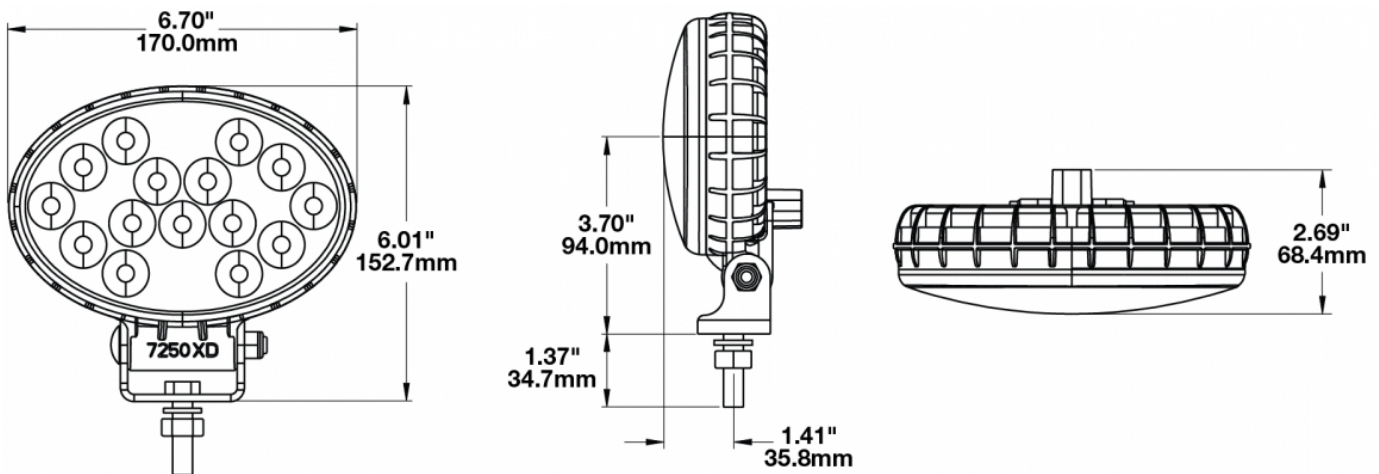

Electrical Specifications




| | |
|--------------------------|----------------------------------|
| Input Voltage | 12-24V DC |
| Operating Voltage | 10-32V DC |
| Black Wire | Ground |
| Red Wire | Power |
| Current Draw | 1.60A @ 12V DC 0.90A @ 24V DC |

Photometric Specifications



| | |
|--------------------------------------|-------------------------------------|
| Raw Lumen Output | 3,150 |
| Effective Lumen Output | 1,400 |
| Nominal LED Color Temperature | 5000 K |
| Beam Pattern(s) | Forward Lighting - Flood (Standard) |

Model 7250XD - Flood Beam

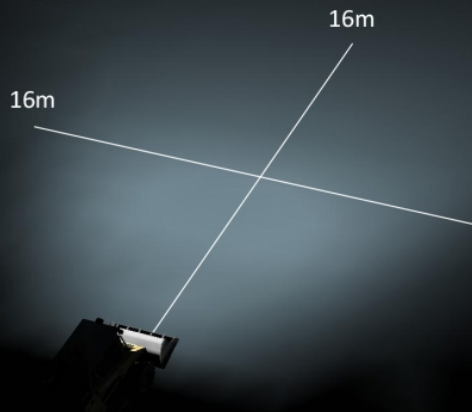

Beam Measurements - 1 Lux

Lamp Mounting: 2.15m High - 10° Down

Additional Specifications



| | |
|----------------------|---------------------------------------------------------------------------------------|
| IP Rating | IP69K |
| Warranty | Please refer to the Warranty Statement which is available for download on the website |
| Certification | CISPR 12 & 22, SAEJ1113-13 |
| Pack Quantity | 1 |