

LED Work Lights – Model 7150


1801621

Product Information

| | |
|--------------------------------------|--|
| Description | Model 7150 - 12/24V LED Worklight - Spot Beam |
| Height | 155.96 mm / 6.14 in |
| Width | 172.47 mm / 6.79 in |
| Depth | 77.11 mm / 3.04 in |
| Shape | Oval |
| Outer Lens Material | Polycarbonate |
| Outer Lens Color | Clear |
| Housing Material | Die-Cast Aluminum |
| Housing Color | Black |
| Mounting Hardware Description | (x1) 1/2"-13 x 1" |
| Minimum Operating Temperature | -40 °C |
| Maximum Operating Temperature | 65 °C |
| Connector or Wiring | Deutsch DT04-2P |
| Mating Connector | Deutsch DT06-2S |
| Product Weight | 2.10 lbs / 0.95 kgs |
| Shipping Weight | 2.10 lbs / 0.95 kgs |



Product Dimensions

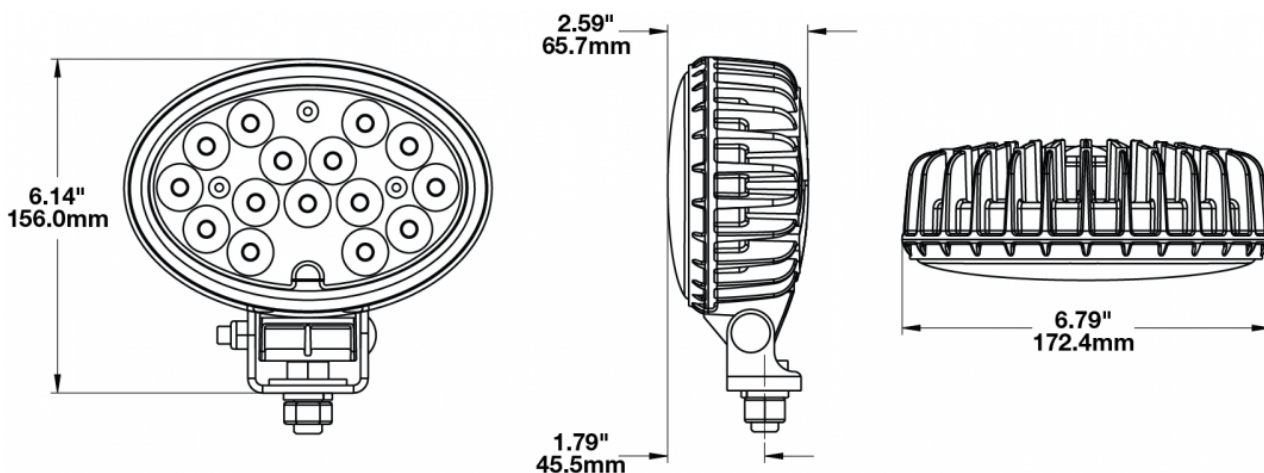


Electrical Specifications

| | |
|-----------------------------------|----------------------------------|
| Input Voltage | 12-24V DC |
| Operating Voltage | 10-32V DC |
| Transient Spike Protection | 330V Peak @ 1 HZ-100 Pulses |
| Red Wire | Power - Positive |
| Black Wire | Ground - Negative |
| Current Draw | 5.50A @ 12V DC 3.20A @ 24V DC |

Photometric Specifications

| | |
|--------------------------------------|-------------------------|
| Raw Lumen Output | 5,400 |
| Effective Lumen Output | 4,500 |
| Nominal LED Color Temperature | 5000 K |
| Beam Pattern(s) | Forward Lighting - Spot |

Model 7150 - Spot Beam

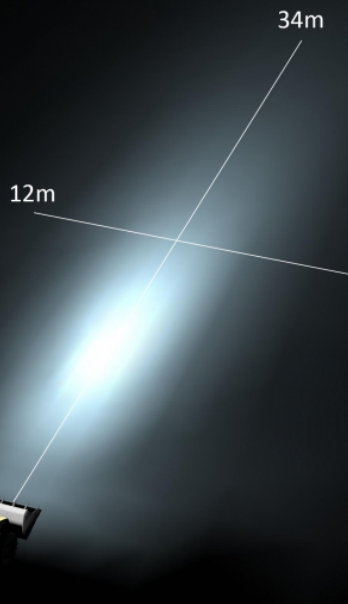

Beam Measurements - 1 Lux

Lamp Mounting: 2.15m High -10° Down

| | |
|----------------------|---|
| IP Rating | IP69K |
| Warranty | Please refer to the Warranty Statement which is available for download on the website |
| Certification | CISPR 12 & 22, SAEJ1113-13 |
| Pack Quantity | 1 |