



LED Warning and Safety Light - Model 529

1300561

Height

Width

Depth

Product Information

Description Model 529 - 12/24V LED Safety

Light - Red Stripe 59.50 mm / 2.34 in 473.50 mm / 18.64 in 54.50 mm / 2.15 in


Shape Rectangular
Outer Lens Material Polycarbonate

Outer Lens ColorClearHousing ColorBlackBezel ColorBlack

Connector or Wiring 3-pin Deutsche



Product Dimensions

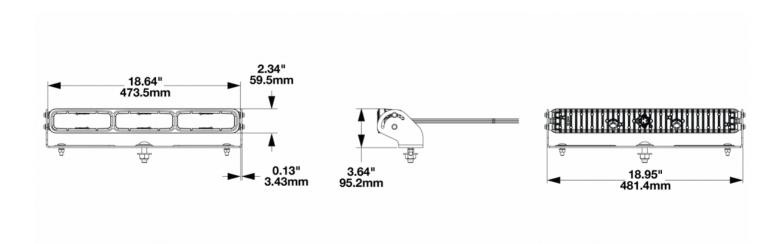





Electrical Specifications

V

Input Voltage12-24V DCOperating Voltage9-33V DC

Transient Spike Protection 330V Peak @ 1 HZ-100 Pulses

Yellow Wire Steady State On White Wire Keep Out Zone Black Wire Ground

Current Draw 3.70A @ 12V DC (Keep Out Zone)


3.70A @ 12V DC (Flashing) 2.30A @ 24V DC (Keep Out Zone) 2.30A @ 24V DC (Flashing)

Photometric Specifications

~

Raw Lumen Output3,350Effective Lumen Output886Candela Output8,530

Flash Rate 1 1 Flash/Second

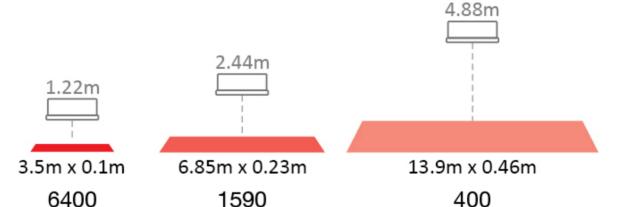

Additional Specifications

Pattern:

Max Lux:



IP Rating IP69K

Warranty Please refer to the Warranty

Statement which is available for

download on the website

Certification Tested to ECE Reg. 10 (Radiated

Emissions only)

Pack Quantity 1



