

LED Work Light – Model 526

1300601

Product Information

Description	Model 526 EVO - 24V LED Worklight - Anti Glare Beam (Low Beam)
Height	160.02 mm / 6.3 in
Width	157.48 mm / 6.2 in
Depth	96.52 mm / 3.8 in
Shape	Square
Outer Lens Material	Polycarbonate
Outer Lens Color	Clear
Housing Material	Die-Cast Aluminum
Housing Color	Black
Mounting Hardware Description	(x1) M10-1.5 x 25 Mounting Bolt
Mounting Type	Universal Pedestal Mount
Minimum Operating Temperature	-40 °C
Maximum Operating Temperature	65 °C
Connector or Wiring	iCONN Connector - iMATE23
Product Weight	4.60 lbs / 2.09 kgs
Shipping Weight	5.00 lbs / 2.27 kgs
Additional Information	Wire Harness: JWS part number 3271781.




Electrical Specifications

Input Voltage	24V DC
Operating Voltage	16-32V DC
Transient Spike Protection	330V Peak @ 1 HZ-100 Pulses
Current Draw	5.00A @ 24V DC

Photometric Specifications

Raw Lumen Output	9,000
Effective Lumen Output	5800
Nominal LED Color Temperature	5700 K

Model 526 - Anti Glare Low Beam

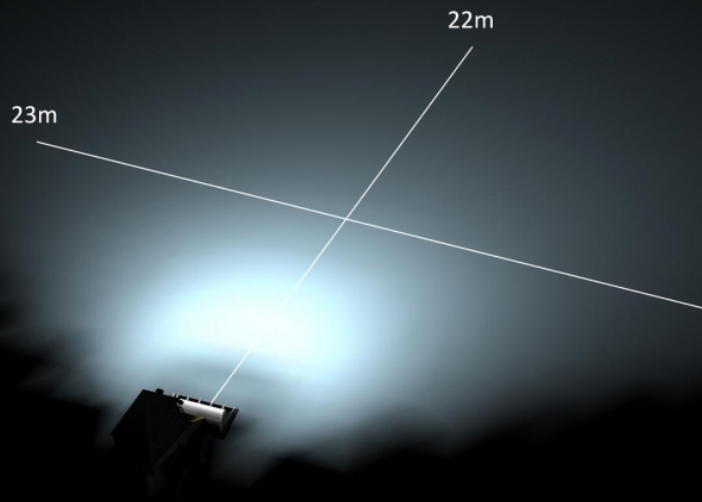

Beam Measurements - 1 Lux

Lamp Mounting: 2.15m High -10° Down

Additional Specifications

IP Rating	IP69K
Warranty	Please refer to the Warranty Statement which is available for download on the website
Pack Quantity	1