# NX3 - LED Mini Bars


# NX384

## Product Information

| | |
|---|---|
| **Description** | LED 10" Amber Mini Bar - 12/24V Class 1 - Magnetic Mount w/ 12V Vehicle Plug |
| **Height** | 45.2 mm / 1.78 in |
| **Width** | 247 mm / 9.72 in |
| **Depth** | 165 mm / 6.5 in |
| **Outer Lens Material** | Hardcoated Polycarbonate |
| **Outer Lens Color** | Clear |
| **Housing Material** | Polycarbonate |
| **Housing Color** | Black |
| **Minimum Operating Temperature** | -30 °C |
| **Maximum Operating Temperature** | 65 °C |
| **Connector or Wiring** | 2.5m hardwire with 12V vehicle plug |
| **Product Weight** | 2.0503 lbs / 0.93 kgs |



## Product Dimensions

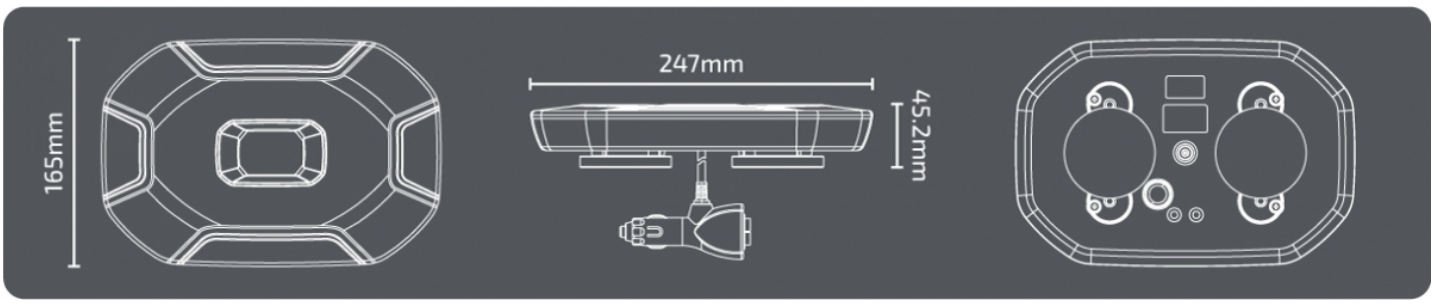


Copyright © 2026 Invision Sales Pty. Ltd.

## Electrical Specifications

| | |
|---|---|
| **Operating Voltage** | 12-24V AC |
| **Current Draw** | 2.1A @ 13.8V AC<br>1.2A @ 24V AC |

## Additional Specifications

| | |
|---|---|
| **IP Rating** | IPSpray - IP66, Submerge - IP67 |
| **Warranty** | 3 Years |
| **Certification** | EMI Approvals: CISPR25 Class 3,<br>ECE R10. Class Approvals: ECE R65<br>Class 1, SAEJ845 Class 1 |
| **Pack Quantity** | 1 |

## Additional Information

### Flash Modes

1) Single Flash – ECE R65 Class 1 (125 FPM)
2) Single Flash (75 FPM)
3) Double Flash (125 FPM)
4) Triple Flash (125 FPM)
5) Rotating (125 FPM)
6) Combination Single / Triple Flash
7) Combination Single / Quint Flash
8) Triple Flash – Alternating Front, Back, In & Out
9) Triple Flash / Single Flash (Triple Flash – Alternating Front, Back, In & Out) (Single Flash – All)
10) Triple Flash / Single Flash / Rotating (Triple Flash – Alternating Front, Back, In & Out) (Single Flash – All) (Rotating – Final Sequence)
11) Strobe (600 FPM)
12) Cruise – 30% Brightness For Night Use

Copyright © 2026 Invision Sales Pty. Ltd.