NX3 - LED Mini Bars


NX385

Product Information

Description	LED 15" Amber Mini Bar - 12/24V Class 1 - Bolt Mount
Height	45.5 mm / 1.79 in
Width	381.4 mm / 15.02 in
Depth	220.4 mm / 8.68 in
Outer Lens Material	Hardcoated Polycarbonate
Outer Lens Color	Clear
Housing Material	Polycarbonate
Housing Color	Black
Minimum Operating Temperature	-30 °C
Maximum Operating Temperature	65 °C
Connector or Wiring	500mm hardwire fly lead
Product Weight	2.976241 lbs / 1.35 kgs



Product Dimensions

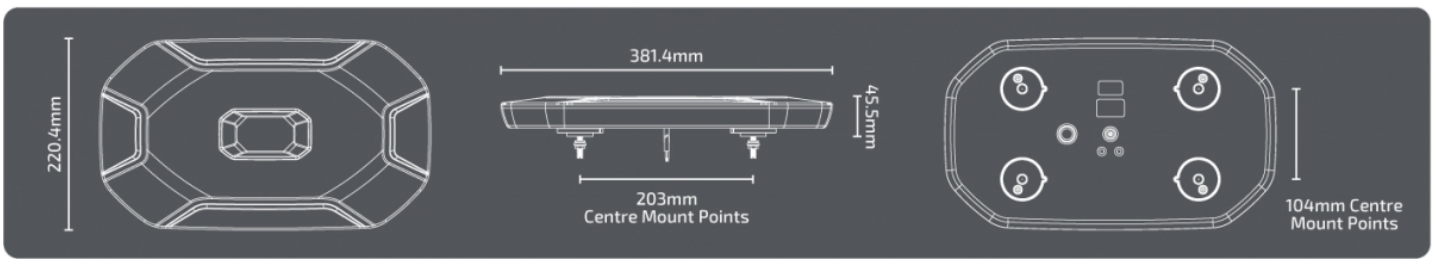

Copyright © 2026 Invision Sales Pty. Ltd.

Electrical Specifications

Operating Voltage	12-24V AC
Red Wire	Positive
Black Wire	Negative
Yellow Wire	Mode Select
Current Draw	3.1A @ 13.8V AC 1.7A @ 24V AC

Additional Specifications

IP Rating	IPSpray - IP66, Submerge - IP67
Warranty	3 Years
Certification	EMI Approvals: CISPR25 Class 3, ECE R10. Class Approvals: ECE R65 Class 1, SAEJ845 Class 1
Pack Quantity	1

Additional Information

Flash Modes

1) Single Flash – ECE R65 Class 1 (125 FPM)
2) Single Flash (75 FPM)
3) Double Flash (125 FPM)
4) Triple Flash (125 FPM)
5) Rotating (122 FPM)
6) Combination Single / Triple Flash
7) Combination Single / Quint Flash
8) Triple Flash – Alternating Front, Back, In & Out
9) Triple Flash / Single Flash (Triple Flash – Alternating Front, Back, In & Out) (Single Flash – All)
10) Triple Flash / Single Flash / Rotating (Triple Flash – Alternating Front, Back, In & Out) (Single Flash – All) (Rotating – Final Sequence)
11) Strobe (600 FPM)
12) Cruise – 30% Brightness For Night Use

Copyright © 2026 Invision Sales Pty. Ltd.