

## NX3 - LED Mini Bars


# NX386

### Product Information

|                                      |                                                                                    |
|--------------------------------------|------------------------------------------------------------------------------------|
| <b>Description</b>                   | LED 15" Amber Mini Bar - 12/24V<br>Class 1 - Magnetic Mount w/ 12V<br>Vehicle Plug |
| <b>Height</b>                        | 49.5 mm / 1.95 in                                                                  |
| <b>Width</b>                         | 381.4 mm / 15.02 in                                                                |
| <b>Depth</b>                         | 220.4 mm / 8.68 in                                                                 |
| <b>Outer Lens Material</b>           | Hardcoated Polycarbonate                                                           |
| <b>Outer Lens Color</b>              | Clear                                                                              |
| <b>Housing Material</b>              | Polycarbonate                                                                      |
| <b>Housing Color</b>                 | Black                                                                              |
| <b>Minimum Operating Temperature</b> | -30 °C                                                                             |
| <b>Maximum Operating Temperature</b> | 65 °C                                                                              |
| <b>Connector or Wiring</b>           | 2.5m hardwire with 12V vehicle<br>plug                                             |
| <b>Product Weight</b>                | 3.30693 lbs / 1.5 kgs                                                              |



### Product Dimensions

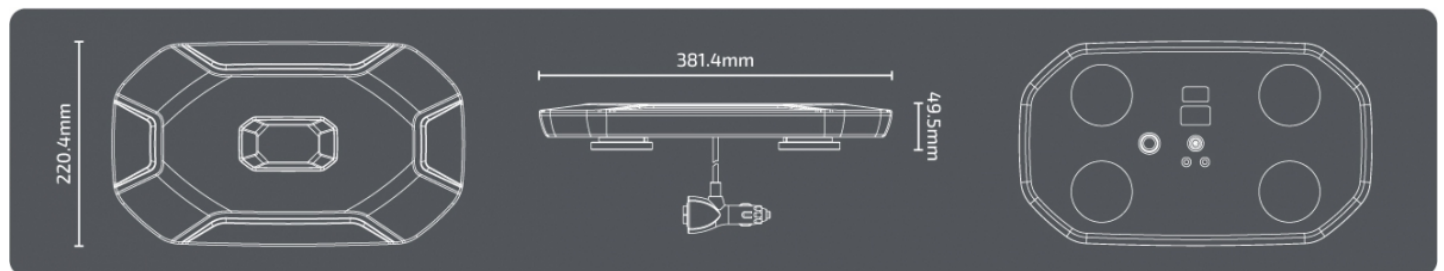

## Electrical Specifications

|                          |                                  |
|--------------------------|----------------------------------|
| <b>Operating Voltage</b> | 12-24V AC                        |
| <b>Current Draw</b>      | 2.1A @ 13.8V AC<br>1.2A @ 24V AC |

## Additional Specifications

|                      |                                                                                                  |
|----------------------|--------------------------------------------------------------------------------------------------|
| <b>IP Rating</b>     | IPSpray - IP66, Submerge - IP67                                                                  |
| <b>Warranty</b>      | 3 Years                                                                                          |
| <b>Certification</b> | EMI Approvals: CISPR25 Class 3,<br>ECE R10. Class Approvals: ECE R65<br>Class 1, SAEJ845 Class 1 |
| <b>Pack Quantity</b> | 1                                                                                                |

## Additional Information

### Flash Modes

- 1) Single Flash – ECE R65 Class 1 (125 FPM)
- 2) Single Flash (75 FPM)
- 3) Double Flash (125 FPM)
- 4) Triple Flash (125 FPM)
- 5) Rotating (122 FPM)
- 6) Combination Single / Triple Flash
- 7) Combination Single / Quint Flash
- 8) Triple Flash – Alternating Front, Back, In & Out
- 9) Triple Flash / Single Flash (Triple Flash – Alternating Front, Back, In & Out) (Single Flash – All)
- 10) Triple Flash / Single Flash / Rotating (Triple Flash – Alternating Front, Back, In & Out) (Single Flash – All) (Rotating – Final Sequence)
- 11) Strobe (600 FPM)
- 12) Cruise – 30% Brightness For Night Use