



×

LED Work Light – Model 735 1706581

Product Information

Description


Description	Trap Beam
Height	137.16 mm / 5.4 in
Width	144.27 mm / 5.68 in
Depth	66.04 mm / 2.6 in
Shape	Oval
Outer Lens Material	Polycarbonate
Outer Lens Color	Clear
Housing Material	Die-Cast Aluminum
Housing Color	Black
Mounting Hardware Description	(x1) 5/16"-18 x 0.58" Mounting Bolt
Mounting Type	Universal Pedestal Mount
Minimum Operating Temperature	-40 °C
Maximum Operating Temperature	65 °C
Connector or Wiring	Integrated 2-Pin Deutsch Weather- Proof Socket (DT04-2P)
Mating Connector	2-Pin Deutsch Weather-Proof Plug (DT06-2S)
Product Weight	1.55 lbs / 0.7 kgs
Shipping Weight	1.87 lbs / 0.85 kgs

Model 735 - 12/24V LED Worklight -





Product Dimensions

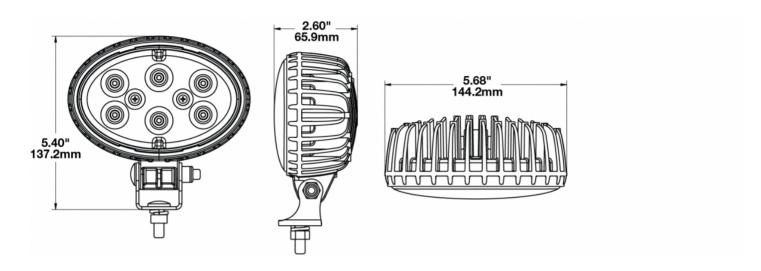

Electrical Specifications

Input Voltage	12-24V DC
Operating Voltage	10-36V DC
Red Wire	Positive
Black Wire	Negative
Current Draw	3.50A @ 12V DC 1.75A @ 24V DC



×

×



Photometric Specifications

Raw Lumen Output	3,900
Effective Lumen Output	2,700
Nominal LED Color Temperature	5700 K
Beam Pattern(s)	Forward Lighting - Trapezoid



Additional Specifications

IP Rating	IP69K
Warranty	Please refer to the Warranty Statement which is available for download on the website
Pack Quantity	1





 \checkmark